




## SSL Speed

Forestry tiller for tractors between 100 and 220 HP with a max working depth of 30 cm.

**Standard equipment:** gear transmission, PTO drive shaft with cam clutch, gearbox with freewheel, hydraulic rear hood.

**Options:** hydraulic top link, hydraulic support roller for height adjustment, self-levelling guard frame, stronger PTO drive line (W2600) (only for DT-models).

**Notes:** for their correct usage, a creeper gear transmission is recommended

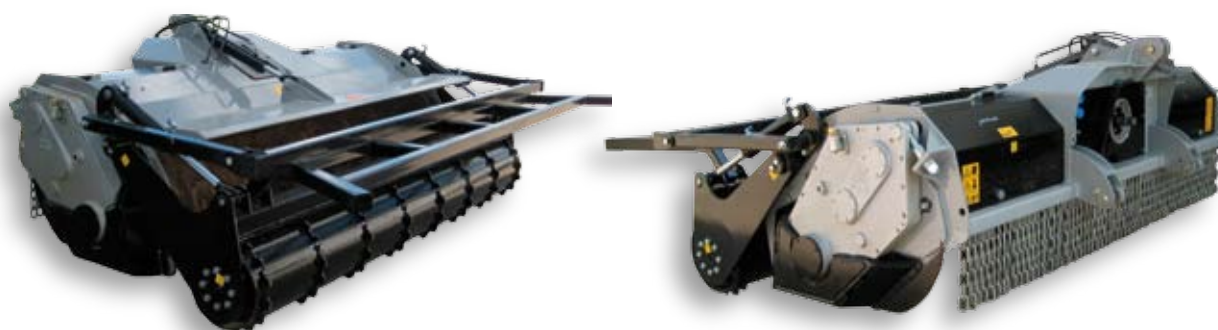

## SSL Speed

Model	Tractor HP min max	PTO rpm	Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Teeth q.ty/type B+4C/SD
SSL Speed 150	100 - 160	1000	1584	1880	2000	300	44 + 4
SSL Speed 175	110 - 160	1000	1824	2120	2160	300	50 + 4
SSL/DT Speed 200	120 - 220	1000	2064	2360	2600	300	58 + 4
SSL/DT Speed 225	130 - 220	1000	2304	2600	2810	300	66 + 4
SSL/DT Speed 250	140 - 220	1000	2544	2680	3030	300	74 + 4

The data refers to the machine without options.



Rotor type SSL



Tooth type B



Tooth type C/SD