



from **80 to 120 HP**

D 15 cm

STONE CRUSHERS WITH FIXED TEETH FOR SKID STEER LOADERS.

Designed and built for High Flow skid steers. Its compact size makes it the ideal solution for dirt and gravel roads, bike and horse trails, driveways, curbs, landscaping and smaller job sites as well as agricultural land reclamation.

The spiral rotor configuration ensures perfect crushing and the HARDOX® counter knives allow you to adjust the size of the final product.


The rear hydraulic door is used to adjust the amount of material exiting the crushing chamber.

STANDARD EQUIPMENT
Hydraulic piston motor 125cc with relief and anticavitation valve
Adjustable hardox counter-blade
Inner hydraulic dozing hood with adjustable cylinder for better output material regulation
Penetration skids
Working pressure control gauge
Hydraulic hoses
Hydraulic top link

OPTIONAL

Diverter valve (plug in and play)

FEATURES

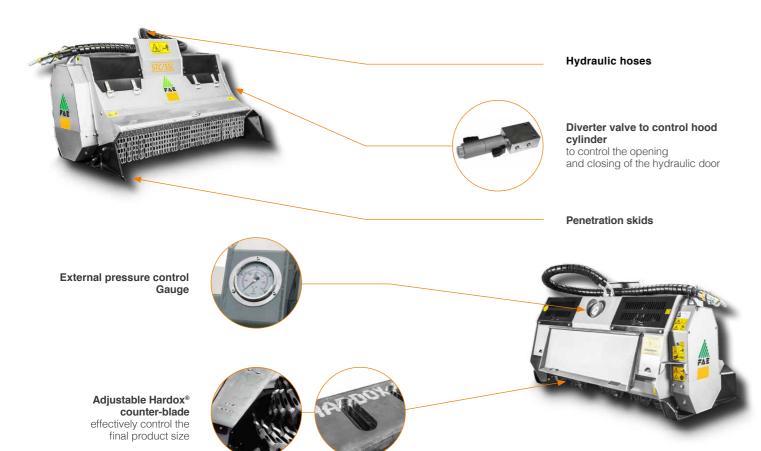



MAIN OPTIONS



Diverter valve to control the cylinders to control the opening and closing of the hydraulic door

TOOTH





STCL/3 (standard)

C/3/SS (side scraper)

MODEL	Power HP (CV)		Requirements Flow L/min		Pressure Bar		Working width	Overall width	Weight	Working depth	Teeth q.ty type STCL/3+C/3/SS
	min	max	min	max	min	max	(mm)	(mm)	(Kg)	(mm)	31CL/3+C/3/33
STC/SSL 125	80	120	130	150	220	350	1350	1650	1090	150	24 + 4
STC/SSL 150	90	120	130	150	220	350	1590	1890	1210	150	30 + 4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.