

FORESTRY TILLERS FOR SPECIAL VEHICLES


300/TD

Demining head with fixed-tooth rotor.

The 300/TD demining tiller has a fixed-tooth rotor designed specifically for demining work. The specially designed frame and rotor, along with the materials used, make it extremely resistant to explosions.



Depth 25 cm

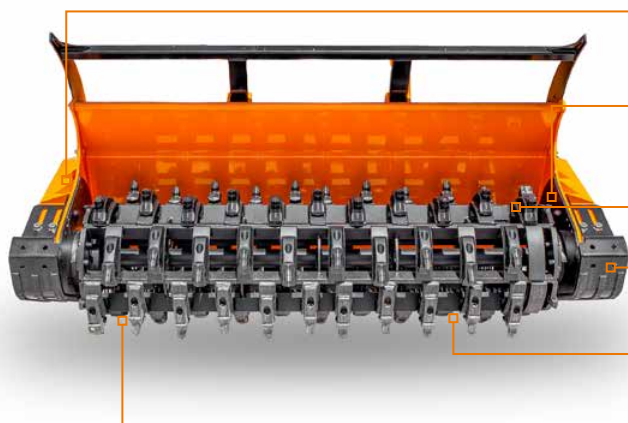

Poly Chain toothed belt transmission

Side wear protection plates

Option to mount rotor and R or G/3 teeth

Adjustable skids

Interchangeable protection chains

Bolt-on chain's protection plates

MODEL	300/TD - 250
Head type	Demining Tiller
Working width (mm)	2500
Total width (mm)	3125
Weight (kg)	3580 (Rotor R) - 3800 (Rotor G/3)
Rotor diameter (mm)	860 (Rotor R) - 885 (Rotor G/3)
No. teeth type G/3+STC/3/FP+BAZ	62+2+4
type R 65+R/HD 65+BAZ	52+2+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



G/3 (standard)



G/3/HD (option)

ROTOR TYPE R



R 65 (standard)



R/HD 65 (option)



STC/3/FP (side scraper)



R/HD 65 (side scraper)