

NEW

ROAD PLANERS FOR SKID STEERS

RPM/SSL

Fixed tooth road planer for skid steers up to 120 hp.

The RPM/SSL is a road planer for skid steers from 75 to 120 hp, able to shred up to 25 cm deep, at a width of 60 cm. The RPM/SSL is ideal for road surface preparation before adding a new layer of asphalt or concrete, or to simplify excavation operations. The self-leveling skids and tilt ensure optimal results on uneven surfaces.

Operational precision is ensured by the hydraulic drive system as well as practical depth and cutting indicators. The line is completed with teeth specifically designed for asphalt and concrete road surfaces.




75-120 hp



Depth  
25 cm



Cutting and depth indicators  
for precise operation control

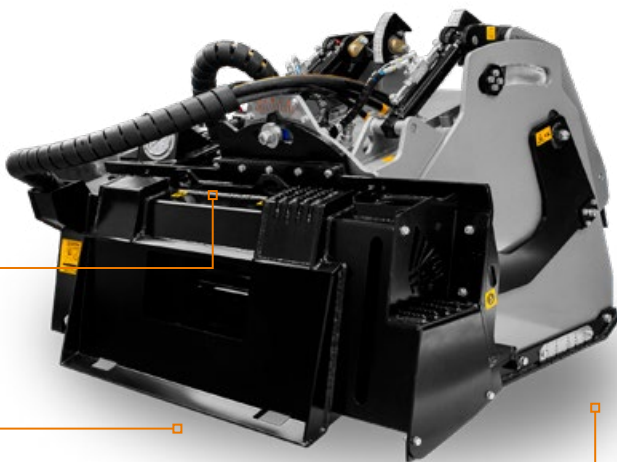

Tilt  
for optimal results on uneven surfaces

Hydraulic drive system  
for accurate positioning over the work area

Self-leveling skids  
With independent hydraulic position control

MAIN OPTIONS



Teeth for working on  
concrete



WSS Basic water injection  
system  
to reduce dust and cool the  
teeth



Wiring adaptors  
Wiring adaptors interface  
to allows a Plug & Play  
coupling with the most  
popular skid steers



Hydraulic tilt  
for direct control from the cab

STANDARD EQUIPMENT

Mechanical floating tilt system (tilt)	Anti-shock block valve with relief and anti-cavitation valves
Independent hydraulic skids control	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Hydraulic side shifting	Asphalt round bit teeth
Enclosed / anti-dust machine body	Cutting indicator
Working pressure control gauge	Diverter valve 12 V
1130 cc fixed displacement hydraulic piston motor	Direct drive motor transmission

OPTIONS

Hydraulic floating tilt system (tilt)	Water spray system WSS Basic
Multiple tooth options	Adaptor wiring

MODEL

	RPM/SSL 60
Engine (hp)	75-120
Requirements Flow (L/min)	100-170
Pressure (bar)	180-350
Working width (mm)	600
Total width (mm)	1650
Weight (kg)	1170
Working depth (mm)	0-250
Rotor diameter (mm)	760
Tilting angle ±	8°
Side shifting (mm)	560
N° teeth type R	60

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R



R 44/A  
(standard)



R 44/C  
(optional)