


FORESTRY MULCHERS FOR EXCAVATORS

PML/EX

Mulcher with hammer/flail rotor for excavators.


The PML/EX flail mulcher for 2–7.5 ton excavators can shred light vegetation, shrubs and trees up to 5 cm in diameter. The head is designed for high productivity, durability, and easy installation and maintenance. The PML/EX's Direct Drive motor minimizes maintenance and makes it possible to have an extremely compact

machine body. The hydraulic motor's compatibility with excavators that do not have a drainage line makes the head easier to install. This feature makes the head a plug and play piece of equipment. The PML/EX can be equipped with PML hammers or Y-flail.

 25-90 L/min


 Ø 5 cm max

 2-7.5 t

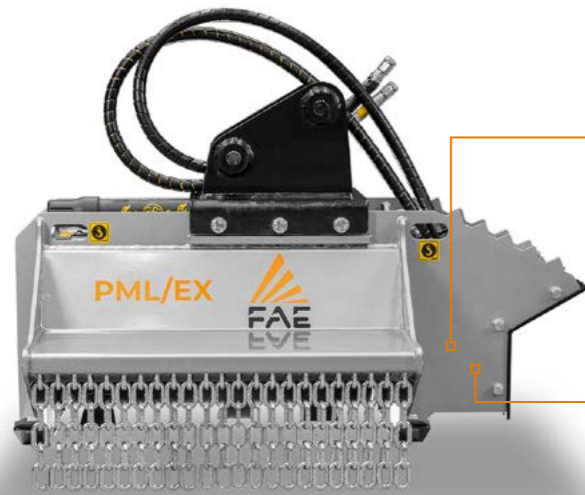

Direct Drive Motor
for less maintenance and greater compactness

Different hydraulic motors
for different excavator models

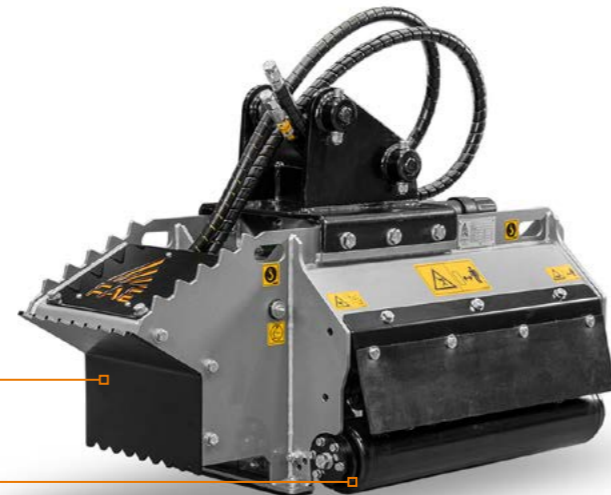

Fixed thumb bracket built into the frame
useful for moving material that needs to be mulched

Adjustable support roller

MAIN OPTIONS



Customized attachment bracket



Attachment plate
for excavators



Possibility to have the rotor equipped with PML hammers or Y-flail

STANDARD EQUIPMENT

11 cc-gear hydraulic motor (PML/EX-75)	Motor enclosed in the frame
16 cc-gear hydraulic motor (PML/EX-100)	Enclosed, dust-resistant machine body
25 cc-gear hydraulic motor (PML/EX-125 and PML/EX-150)	Wear-resistant interchangeable Hardox® soles
Flow Control valve with integrated safety and anticavitation valves	Hydraulic hoses
Direct-drive transmission	Thumb bracket
Interchangeable protection chains	Pressed steel counter blades (welded)
Support roller	Deflector (PML/EX-125 and PML/EX-150)
Rubber protection strips	Rubber protection strips (PML/EX-75, PML/EX-100)

OPTIONS

25 cc-gear hydraulic motor (PML/EX-75 and PML/EX-100)	Customized attachment bracket kit with customized pins
16 cc-gear hydraulic motor PML/EX-75, PML/EX-125 and PML/EX-150)	Attachment plate with self-leveling device
11 cc-gear hydraulic motor (PML/EX-100, PML/EX-125 and PML/EX-150)	Multiple tooth options
Rubber protection strips (PML/EX-125, PML/EX-150)	

MODEL	PML/EX-75	PML/EX-100	PML/EX-125	PML/EX-150
Flow rate (L/min)	25-90	25-90	25-90	25-90
Pressure (bar)	180-250	180-250	180-250	180-250
Excavator weight (t)	2-4	3.5-5.5	5-7.5	5-7.5
Working width (mm)	712	1016	1256	1496
Weight (kg)	210	270	300	340
Rotor diameter (mm)	360	360	360	360
Max shredding diameter (mm)	40	50	50	50
No. hammers type PML	10	16	20	24
No. flail type Y/2	10	16	20	24

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.



HAMMER PML
(standard)



FLAIL Y/2
(option)