

ATTACHMENT

REMOTE CONTROLLED PRODUCTIVITY

BLO/RCU

Forestry mulcher with Bite Limiter technology

The BLO/RCU is able to mulch branches and shrubs up to 10 cm in diameter. The Bite Limiter technology offers high productivity even at low horsepower.



PML/RCU

Mulcher with hammer/flail rotor for RCU45.

The PML/RCU is a high-efficiency swinging hammer mulcher for grass, thorny brush, branches and small shrubs up to 5 cm in diameter.



MODEL	BLO/RCU45-125	PML/RCU45-130
Head type	Forestry mulcher	Flail mulcher
Working width (mm)	1240	1316
Total width (mm)	1451	1448
Weight (Kg)	400	325
Rotor diameter (mm)	310	360
Max shredding diameter (mm)	100	50
No. blades type BL/MINI	24	-
No. teeth type C/3/MINI	24	-
No. flais type Y/2	-	22+22
No. hammers type PML	-	22

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE BL



BLADE BL/MINI (standard)

TOOTH C/3/MINI (option)

ROTOR TYPE PML



FLAIL Y/2 (standard)

HAMMER PML (option)

01 Robust

Steel structural frame.
Integrated and protected components.

02 Agile

Works on sloping terrain up to 55°.
Full axis rotation.

03 Bite Limiter

Available with the BLO/RCU forestry mulcher with Bite Limiter technology.

04 High-tech

Integrated system of control units and sensors for maximum performance at all times.

05 Professional

The result of wide FAE's experience on tracked carries for forestry and demining sectors.



LAND CLEARING
RCU45



fae-group.com

REMOTE CONTROLLED TRACKED CARRIERS

EN

RCU45


Working in hard-to-reach areas or on steeply sloping terrain requires special equipment that ensures user safety and operating efficiency. FAE's compact RCU remote-controlled tracked carriers are the result of FAE's experience in designing tracked carriers in the PT series and developing remote-guidance systems for the vehicles in our Demining line. The RCU45 has been designed for optimal vegetation maintenance. Its versatility makes it well-suited for working in municipal green areas, in hilly and wooded areas, near railroad tracks, power lines, gas and oil pipelines, and nurseries, and along roads, highways, canals, rivers, and lakes.



APPLICATIONS:

- Forestry maintenance
- Power line, oil pipeline, and gas pipeline maintenance
- Roadside and railway line maintenance
- Plantation and nursery maintenance
- Canal, river, and lake maintenance

DIMENSION

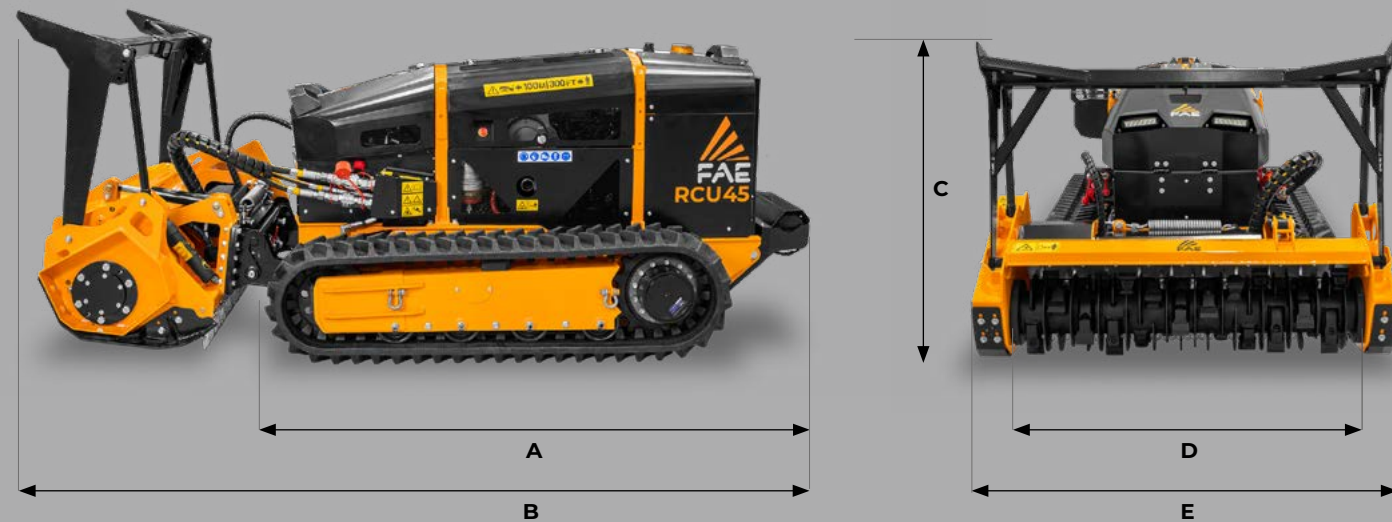

A Overall length without attachment 1970 mm
B Transport length with BLO/RCU attachment on ground 3090 mm

C Max height 1120 mm
D Overall track width 1300 mm
E See attachments table

ULTRA-COMPACT, REMOTE CONTROLLED TRACKED CARRIER FOR FORESTRY, AGRICULTURAL AND MUNICIPAL WORK

RCU45

The RCU45 is able to shred branches, wood, grass, and small shrubs, thanks to the different attachments with which it can be fitted. It is efficiently powered by the 44-hp Yanmar common rail engine with electronic fuel injection. The RCU45 can work on steep slopes of up to

55°. The heavy-duty undercarriage, featuring an automatic rubber track tensioning system, has been designed to operate under the most challenging conditions. The dual hydrostatic transmission makes it easier to manage both traction and the attachment.

APP FAE

The FAE App can be used to manage various settings of the RCU45. It also allows users to reposition the vehicle if the remote control cannot be used, to monitor data in real time, to run diagnostics in the event of a component or system failure, and to receive scheduled maintenance notifications.



EFFICIENT AND RELIABLE TRANSMISSION

Electronically controlled piston pumps combined with a dedicated electronic control unit provide an integrated technological system. The result is high performance and long-term reliability, as well as simple and intuitive operation.



HEAVY DUTY UNDERCARRIAGE

The heavy-duty undercarriage, featuring an automatic rubber track tensioning system, has been designed to operate under the most challenging conditions, guaranteeing unbeatable traction even on steep slopes of up to 55°.

STANDARD EQUIPMENT

Engine YANMAR 3TNV86CT Turbocharged	High-profile rubber tracks and roller system
DOC/DPF after-treatment system	Combined aluminum cooler with anti-clogging fins
Hydrostatic tracks transmission	Proportional and reversible radiator fan
Hydrostatic attachments transmission	Ergonomic joysticks
Auxiliary hydraulic circuit for attachments	4.3" LCD color display on remote control unit
RCU45 attachment plate	Double remote control battery and on-board battery charger
Load Control System	LED working lights
Floating System	

OPTIONS

Rear electric recovery winch	Bio-oil
------------------------------	---------



44 hp

PROFESSIONAL REMOTE CONTROL

The ergonomic remote control with a large 4.3" display makes it easy to manage all vehicle and head functions. User-customizable function keys. 2.4 GHz transmission frequency.



SELF-CLEANING RADIATOR

The combined aluminum radiator with anti-clogging fins is paired with a proportional and reversible fan with hydraulic control, in order to keep the radiator clean and efficient at all times, consistently maintaining peak performance and reducing the need for upkeep.



TECHNICAL DATA

RCU45 - Tier 4 Final / Stage V

Engine Gross Power	44 hp	
Engine Emission	EPA Tier 4 Final - EU Stage V	
Hydrostatic closed loop circuit	Max Pressure 290 bar	
Attachment closed loop circuit	Max Flow 62 L/min - Max Pressure 290 bar	
Open Loop	AUX 1	Max Flow 20 L/min - Max Pressure 150 bar
	AUX 2	Max Flow 30 L/min - Max Pressure 150 bar
Lifting Capacity	Max 450 Kg @ center of gravity position: Height 270 mm from the ground level / Length 350 mm from the attachment plate / Width on RCU central axis	
Hydraulic Oil Tank Capacity	25 L	
Fuel Tank Capacity	31 L	
Rubber Track	72 mm Pitch - 250 mm width - High profile	
Lower Rollers	4+ 4 HD style - Double flange	
Front Idler / Tensioning Group	Single flange idler - Automatic tensioning system	
Voltage	12 Volt	
Max Forward Speed	4,9 Km/h (L mode); 7,5 Km/h (H mode)	
Max Reverse Speed	4,9 Km/h (L mode); 7,5 Km/h (H mode)	
Gradeability	55° - All directions	
Operating Weight	1320 Kg (std equipment/ standard rubber tracks)	
Ground Pressure	0,26 Kg/cm ² (std equipment / standard rubber tracks / BLO/RCU45-125)	

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.