ROAD PLANERS FOR SKID STEERS

RPM/SSL

Road planer for skid steers from 75 to 135 hp.

The RPM/SSL is a road planer for skid steers from 75 to 135 hp, able to shred up to 25 cm deep, at a width of 60 cm. The RPM/SSL is ideal for road surface preparation before adding a new layer of asphalt or concrete, or to simplify excavation operations. The self-leveling skids and tilt ensure optimal results on uneven surfaces.

Operational precision is ensured by the hydraulic drive system as well as practical depth and cutting indicators. The line is completed with teeth specifically designed for asphalt and concrete road surfaces.

75-135 hp

Depth
25 cm

Cutting and depth indicators
for precise operation control

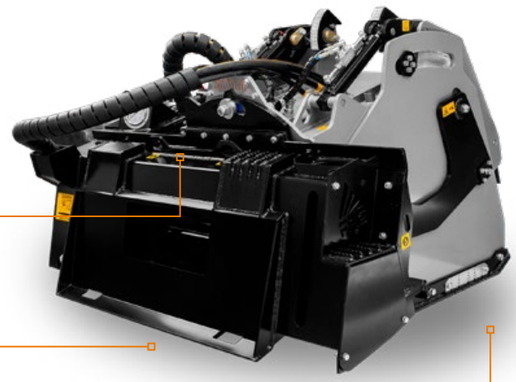

Tilt
for optimal results on uneven surfaces

Hydraulic drive system
for accurate positioning over the work area

Self-leveling skids
With independent hydraulic position control

MAIN OPTIONS

Teeth for working on concrete

WSS Basic water injection system
to reduce dust and cool the teeth

Wiring adaptors
Wiring adaptors interface to allows a Plug & Play coupling with the most popular skid steers

STANDARD EQUIPMENT

Mechanical floating tilt system (tilt)	Anti-shock block valve with relief and anti-cavitation valves
Independent hydraulic skids control	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Hydraulic side shifting	Asphalt round bit teeth
Enclosed / anti-dust machine body	Cutting indicator
Working pressure control gauge	Diverter valve 12 V
1130 cc fixed displacement hydraulic piston motor	Direct drive motor transmission

OPTIONS

Multiple tooth options	Adaptor wiring
Water spray system WSS Basic	SAE attachment frame with integrated water tank
Roof mounted water tank kit for skid steer	Hydraulic movements kit with locked rotor

MODEL	RPM/SSL-60
Engine (hp)	75-135
Requirements Flow (L/min)	120-170
Pressure (bar)	180-350
Working width (mm)	600
Total width (mm)	1650
Weight (kg)	1170
Working depth (mm)	0-250
Rotor diameter (mm)	765
Tilting angle ±	8°
Side shifting (mm)	560
N° picks type R	66

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R

PICK R/44/A
(standard)

PICK R/44/C
(optional)