

## STONE CRUSHERS

# STCH

### Stone crusher for PTO tractors with fixed teeth rotor.

FAE renews the existing STCH range, adapting to the most powerful tractors (from 280 to 400 hp), with a maximum operating depth of 25 cm and the ability to crush stones up to 50 cm in diameter. Among the main technical innovations there is the hydraulic counter blade that can be adjusted directly from the tractor's cab, the oversized door and interchangeable

internal Hardox® protections. It is also equipped with a new side-scraper system to limit side wear, adjustable skids, as well as interchangeable protection chains. The three models available (with working widths of 200, 225 and 250 cm) make it perfect for different jobs, particularly to treat soils with large quantities of moving stones.

 280-400 hp

 Ø 50 cm max (stones)

 Depth 25 cm



**Completely closed/dust-resistant machine body** to protect the machine's transmission and components



**Hydraulic rear hood** for an optimal material sizing and control



**Skids with interchangeable Hardox® shoes and ploughshares** allows an easy maintenance & an improved machine penetration into the soil




**Hydraulic counter-blade** allows to check the size of the shredded material directly from the tractor cab

**Oversized material inlet** allows also to surface stones to enter the crushing chamber



**Interchangeable internal Hardox® wear plates** for use in extreme conditions and for easier maintenance

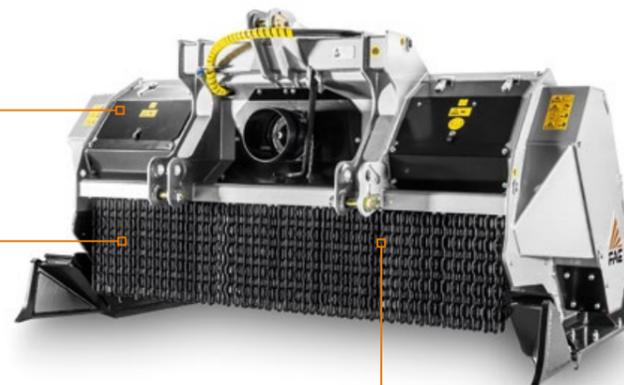

### MAIN OPTIONS



**Grader blade (road kit)** for grading and compaction



**Hydraulic top link** for an optimal working depth control



**Dozing blade** to level the crushed material



**Dozing blade with springs system** to level and compact the crushed material, creating a uniform base

### STANDARD EQUIPMENT

Hydraulic rear hood	Gearbox with freewheel
Interchangeable inner antiwear plates in Hardox®	PTO shaft
Enclosed machine body	Cam clutch on side PTO
Centralized greasing hub	Bolted-on rotor shafts (in forged steel)
Inside lateral protection	Adjustable Hardox® counter-blade
Dual row protection chains	Adjustable skids
Transmission with belts	Penetration skids
Flat pressed welded steel counter-blades	

### OPTIONS

Multiple tooth options	Grader blade (road kit)
Hydraulic top link	Dozing blades with spring system
Dozing blade	

MODEL	STCH 200	STCH 225	STCH 250
<b>Tractor (hp)</b>	280-400	280-400	280-400
<b>PTO (rpm)</b>	1000	1000	1000
<b>Working width (mm)</b>	2080	2320	2560
<b>Total width (mm)</b>	2566	2806	3046
<b>Weight (kg)</b>	4850	5050	5250
<b>Rotor diameter (mm)</b>	695	695	695
<b>Max shredding diameter (mm)</b>	500	500	500
<b>Max working depth (mm)</b>	250	250	250
<b>No. teeth type STC/3+STC/3/HD+STC/FP</b>	50+4+4	56+4+4	62+4+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.



**STC/3**  
(standard)



**STC/3/HD**  
(option)



**STC/3/FP**  
(option)



**STC/3/HD**  
(side scraper)



**STC/FP**  
(side scraper)