

MULTITASKS

MTL


FAE multi-function head for tractors from 140 to 240 hp.

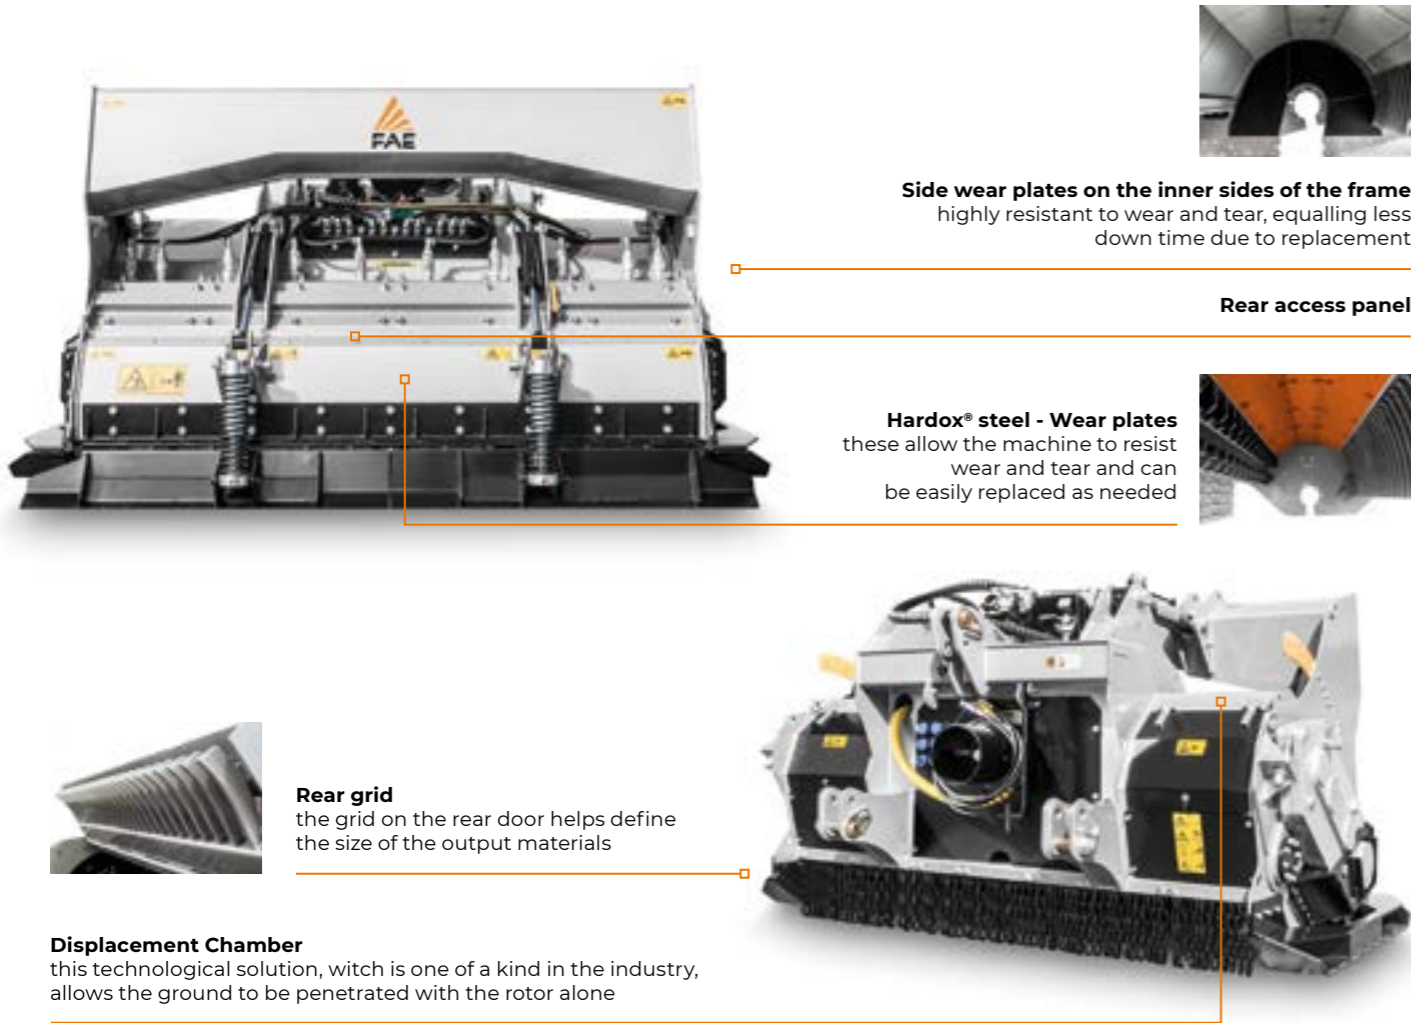
The MTL enables ground stabilization, milling of asphalt and slabs of rock, and crushing of stones, down to a maximum operating depth of 28 cm. The variable-geometry crushing chamber, adjustable grid on the hood and adjustable Hardox® counter blade enable constantly optimal crushing results. Internal protection plates on the frame, bolted both centrally

and laterally, ensure the head is robust and reliable. The handy depth indicator allows you to check the operating level directly from the cab. The central gearbox system with universal-joint alignment system is designed to be compatible with a wide range of tractors on the market.

 140-240 hp

 Depth 28 cm max

 Variable displacement chamber

Side wear plates on the inner sides of the frame
highly resistant to wear and tear, equalling less down time due to replacement

Rear access panel

Hardox® steel - Wear plates
these allow the machine to resist wear and tear and can be easily replaced as needed

Rear grid
the grid on the rear door helps define the size of the output materials

Displacement Chamber
this technological solution, which is one of a kind in the industry, allows the ground to be penetrated with the rotor alone

STANDARD EQUIPMENT

Hydraulic rear hood	Transmission with side gearbox
Interchangeable inner antiwear plates in Hardox®	Gearbox with freewheel
Enclosed machine body	Friction clutches
Variable displacement chamber	PTO shaft with cam clutch
Bolted grid on rear hood	Bolted-on rotor shafts (in forged steel)
Inside lateral protection	Adjustable Hardox® counter-blade
Bolted on protection chains	Dozing blades with spring system

OPTIONS

Multiple tooth options	Water spray system WSS Basic
Hydraulic top link	Water spray system WSS High Flow

MODEL	MTL 150	MTL 175	MTL 200	MTL 225
Tractor (hp)	140-240	150-240	160-240	170-240
PTO (rpm)	1000	1000	1000	1000
Working width (mm)	1480	1720	1960	2200
Total width (mm)	1820	2060	2300	2540
Weight (Kg)	3370	3620	3870	4120
Rotor diameter (mm)	595	595	595	595
ROTOR G/3				
Working depth (mm) (Max. 1-Max. 2)	150-280	150-280	150-280	150-280
No. teeth type G/3+STC/3/FP	42+6	50+6	60+6	70+6
ROTOR R (optional)				
Rotor diameter (mm)	612	612	612	612
Working depth (mm) (Max. 1-Max. 2)	150-280	150-280	150-280	150-280
No. picks type R/65+R/65/HD	98+16	114+16	138+16	154+16

Max. 1: with rotor only **Max. 2:** maximum depth (maximum working depth depending on ground conditions).
This information refers to the machine equipped as standard. The technical data in this catalogue may be altered without prior notice.

MAIN OPTIONS



Hydraulic top link



Multiple tooth options



The **Water Spray System** (Basic & High Flow) has the dual function of cooling and mixing



ROTOR TYPE G

TOOTH G/3 (standard) **TOOTH G/3/HD** (option)

ROTOR TYPE R

PICK R/65 (standard) **PICK R/65/HD** **ADAPTOR R/65 WITH PICK R/44** (option)

TOOTH STC/3/FP (side scraper) **PICK R/65/HD** (side scraper)