

NEW

ROAD PLANERS FOR SKID STEERS

# RPL/SSL/DT

## Dual transmission road planer for skid steers up to 135 hp.

The RPL/SSL/DT is a road planer for skid steers from 90 to 135 hp that mills down to 14 cm deep. The RPL/SSL/DT is ideal for road preparation before adding a new layer of asphalt or concrete. Self-leveling skids and tilt ensure optimal results. Operational precision is also ensured by the hydraulic drive system — which makes it possible to work right up against a wall on the

right or left — as well as practical depth and cutting indicators. The dual transmission guarantees optimal power supply and distribution across the entire width of the rotor. The line is completed with teeth specifically designed for asphalt and concrete road surfaces.



90-135 hp



Depth 14 cm



**Extraordinary precision**  
it can work very close to the walls at left and at right




**Cutting and depth indicators**  
for precise operation control

**Tilt**  
for optimal results on uneven surfaces

**Hydraulic drive system**  
for accurate positioning over the work area

**Self-leveling skids**  
With independent hydraulic position control

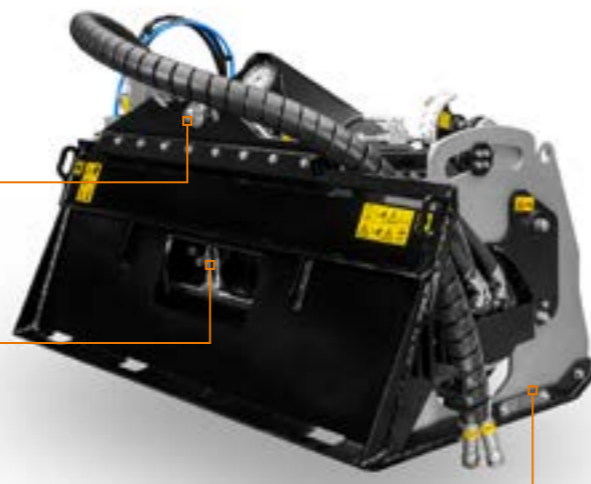

### STANDARD EQUIPMENT

Mechanical floating tilt system	Anti-shock block valve with relief and anti-cavitation valves
Independent hydraulic skids control	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Hydraulic side shifting	Asphalt round bit teeth
Enclosed / anti-dust machine body	Cutting indicator
Working pressure control gauge	Diverter valve 12 V
565 cc fixed displacement hydraulic piston motor	Direct drive motor transmission

### OPTIONS

Hydraulic floating tilt system	Water spray system WSS Basic
Multiple tooth options	Adaptor wiring

MODEL	RPL/SSL/DT 100	RPL/SSL/DT 125	RPL/SSL/DT 150
<b>Engine (hp)</b>	90-135	90-135	90-135
<b>Requirements Flow (L/min)</b>	120-200	120-200	120-200
<b>Pressure (bar)</b>	180-350	180-350	180-350
<b>Working width (mm)</b>	1000	1250	1500
<b>Total width (mm)</b>	1650	1650	1650
<b>Weight (kg)</b>	1150	1250	1350
<b>Working depth (mm)</b>	0-140	0-140	0-140
<b>Rotor diameter (mm)</b>	600	600	600
<b>Tilting angle ±</b>	± 8°	± 8°	± 8°
<b>Side shifting (mm)</b>	560	560	560
<b>N° picks type R</b>	78	96	114

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

### MAIN OPTIONS



**Teeth for working on concrete**



**WSS Basic water injection system**  
to reduce dust and cool the teeth



**Wiring adaptors**  
Wiring adaptors interface to allows a Plug & Play coupling with the most popular skid steers



**Hydraulic tilt**  
for direct control from the cab

### ROTOR TYPE R



**PICK R/44/A**  
(standard)



**PICK R/44/C**  
(optional)