

STONE CRUSHERS

RSH


Stone crusher for tractors from 360 to 500 hp.

RSH is FAE's most advanced stone crusher. It is suited for crushing slabs of rock and stones up to 50 cm in diameter and 50 cm deep. It works with 360-500 hp tractors and has a working width of 210-260 cm. RSH is made for difficult farmland clearing work in places where large rocks and stones need to be cleared to prepare the field for agricultural use.

Its wide opening guides large material towards the rotor and, in combination with the adjustable counterblade, helps maintain consistently high performance when working the soil.



360-500 hp



Ø 50 cm max (stones)



Depth 50 cm




Structural frame in steel
maximum strength and durability
in heavy duty operations

Interchangeable Hardox® anti wear plates
quick and easy maintenance



Side reduction gears and central gearbox with oilcooling system
maximum productivity and efficiency
maintained in all working conditions

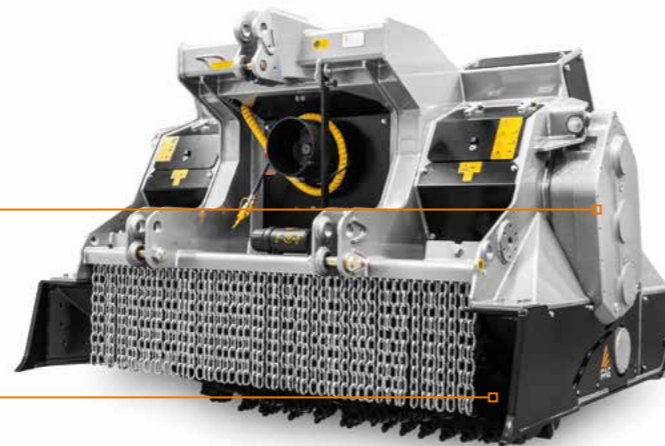

Wide opening
to efficiently process more material

MAIN OPTIONS



Rear hood grill
allows larger material to be held back and crushed again for optimum results



Adjustable steel dosing blade
perfect distribution of the crushed material



Hydraulic top link
precise control over operations

STANDARD EQUIPMENT

Hydraulic rear hood	Gearbox with freewheel
Interchangeable inner antiwear plates in Hardox®	Gearbox with oil cooling system
Enclosed machine body	PTO shaft
Inside lateral protection	Friction clutches
Protection chains	Bolted-on rotor shafts (in forged steel)
Transmission with side gearbox	Adjustable Hardox® counter-blade
Side gearbox with oil cooling system	Penetration skids

OPTIONS

Bolted grid on rear hood	Hydraulic top link
Multiple tooth options	Dozing blade

MODEL	RSH/HP-200	RSH/HP-225	RSH/HP-250
Tractor (hp)	360-500	360-500	360-500
PTO (rpm)	1000	1000	1000
Working width (mm)	2107	2347	2587
Total width (mm)	2670	2910	3150
Weight (kg)	7050	7450	7850
Max shredding diameter (mm)	500	500	500
ROTOR G/3			
Rotor diameter (mm)	1115	1115	1115
Working depth (Max. 1-Max.2)(mm)	360-500	360-500	360-500
No. teeth type G/3	104	116	132
	type STC/3/FP+STC/FP	4+4	4+4
ROTOR R			
Rotor diameter (mm)	1065	1065	1065
Working depth (Max. 1-Max.2)(mm)	345-500	345-500	345-500
No. picks type R/65	178	200	220

Max. 1: with rotor only Max. 2: maximum depth (maximum working depth depending on ground conditions).
Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



TOOTH G/3
(standard)



TOOTH G/3/HD
(option)

ROTOR TYPE R



PICK R/65
(option)



TOOTH STC/3/FP
(side scraper)



TOOTH STC/FP
(side scraper)