

STONE CRUSHERS

RSM


Stone crusher for tractors from 200 to 360 hp.

RSM models are designed to crush slabs of rock and stones up to 50 cm in diameter and 40 cm deep. They work with 200-360 hp tractors and have a working width of 200-230 cm. FAE's RSM line is made for difficult farmland clearing work in places where large rocks and stones need to be cleared to prepare the field for agricultural use.

Its wide opening guides large material towards the rotor and helps maintain consistently high performance when working the soil. An adjustable counterblade makes it possible to crush material to the desired fineness.



200-360 hp



Ø 50 cm max (stones)



Depth 40 cm




Structural frame in steel
maximum strength and durability
in heavy duty operations

**Interchangeable
Hardox® anti wear plates**
quick and easy maintenance



**Oil-cooling system
for side gears**
greater efficiency and lifespan
(optional for RSM)

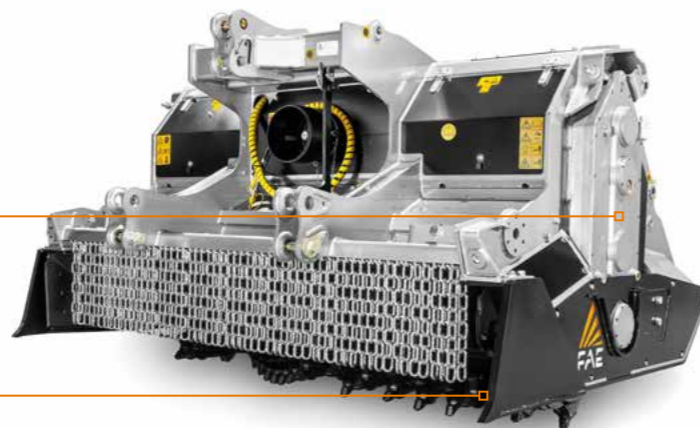

Wide opening
to efficiently process more material

MAIN OPTIONS



Rear hood grill
allows larger material to be held back and crushed again for optimum results



Adjustable steel dosing blade
perfect distribution of the crushed material



Hydraulic top link
precise control over operations



Steel dosing blades with spring system
excellent even distribution of material and precompaction

STANDARD EQUIPMENT

Hydraulic rear hood	Friction clutches
Interchangeable inner antiwear plates in Hardox®	PTO shaft with cam clutch (RSM)
Enclosed machine body	PTO shaft (RSM/HP)
Inside lateral protection	Bolted-on rotor shafts (in forged steel)
Protection chains	Adjustable Hardox® counter-blade
Transmission with side gearbox	Penetration skids
Gearbox with freewheel	Side gearboxes with oil cooling system (RSM/HP)

OPTIONS

Bolted grid on rear hood	Dozing blade
Multiple tooth options	Dozing blades with spring system
Hydraulic top link	Side gearbox with oil cooling system (RSM)

MODEL	RSM-200	RSM-225	RSM/HP-200	RSM/HP-225
Tractor (hp)	200-300	220-300	300-360	300-360
PTO (rpm)	1000	1000	1000	1000
Working width (mm)	2080	2320	2080	2320
Total width (mm)	2490	2730	2490	2730
Weight (kg)	5160	5590	5160	5590
ROTOR G/3				
Rotor diameter (mm)	940	940	940	940
Working depth (Max. 1-Max.2)(mm)	2080	2320	2080	2320
ROTOR R/65				
Rotor diameter (mm)	915	915	915	915
Working depth (Max. 1-Max.2)(mm)	237-400	237-400	237-400	237-400
Max shredding diameter (mm)	500	500	500	500
No. teeth type R/65	158	176	158	176

Max. 1: with rotor only Max. 2: maximum depth (maximum working depth depending on ground conditions).
Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



TOOTH G/3
(standard)



TOOTH G/3/HD
(option)

ROTOR TYPE R



PICK R/65
(option)



PICK R/65/HD
(option)



TOOTH STC/3/FP
(side scraper)



TOOTH STC/FP
(side scraper)