

FORESTRY TILLERS FOR SPECIAL VEHICLES

200/S

Universal hydraulic tiller for higher horse power carriers.

The 200/S is lightweight and comes in different widths, making it perfect for a wide range of vehicles. The gear drive lets the rotor work at a slower speed than conventional belt-driven forestry mulchers.




250-300 hp



Ø 30 cm max



Depth 30 cm

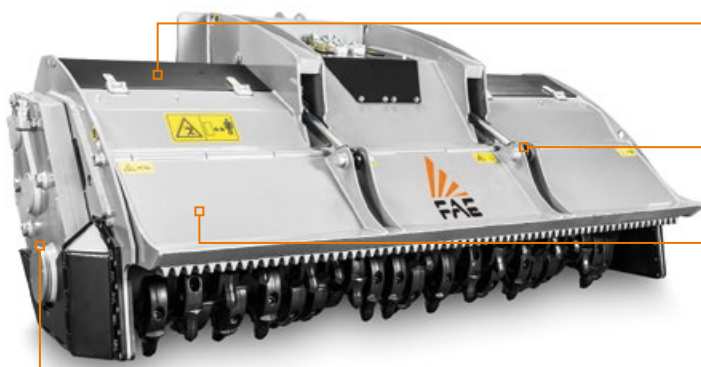

Customized attachment plate (optional)

Hydraulically controlled hood to adjust final product size

180 cc hydraulic motor

Dual transmission with side gearbox

STANDARD EQUIPMENT

Considering the various available options and high level of customization, the final configuration will be specified upon request.

MODEL	200/S 225	200/S 250
Engine (hp)	250-300	250-300
Flow rate (L/min)	355-410	355-410
Pressure (bar)	320-400	320-400
Working width (mm)	2320	2560
Total width (mm)	2662	2902
Weight (kg)	3162	3400
Rotor diameter (mm)	600	600
Max working depth (mm)	300	300
Max shredding diameter (mm)	300	300
No. teeth type B/3+C/3/SS	82+4	96+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE B



TOOTH B/3
(standard)



TOOTH G/3
(option)



TOOTH G/3/HD
(option)



TOOTH C/3/SS
(side scraper)