

NEW

ROAD PLANERS FOR SKID STEERS

RPL/SSL/DT

Dual transmission road planer for skid steers up to 135 hp.

The RPL/SSL/DT is a road planer for skid steers from 90 to 135 hp that mills down to 5.5 in deep. The RPL/SSL/DT is ideal for road preparation before adding a new layer of asphalt or concrete. Self-leveling skids and tilt ensure optimal results. Operational precision is also ensured by the hydraulic drive system — which makes it possible

to work right up against a wall on the right or left — as well as practical depth and cutting indicators. The dual transmission guarantees optimal power supply and distribution across the entire width of the rotor. The line is completed with teeth specifically designed for asphalt and concrete road surfaces.



90-135 hp



Depth 5.5 in



Extraordinary precision

it can work very close to the walls at left and at right




Cutting and depth indicators
for precise operation control

Tilt
for optimal results on uneven surfaces

Hydraulic side shifting
for accurate positioning over the work area

Self-leveling skids
With independent hydraulic position control

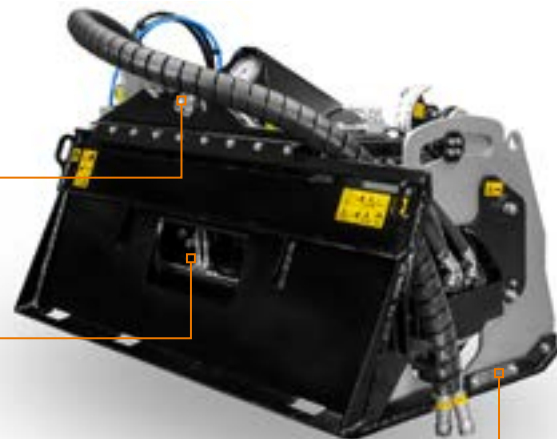

MAIN OPTIONS



Teeth for working on concrete



WSS Basic water injection system
to reduce dust and cool the teeth



Wiring adaptors
Wiring adaptors interface to allows a Plug & Play coupling with the most popular skid steers



Hydraulic tilt
for direct control from the cab

STANDARD EQUIPMENT

Mechanical floating tilt system	Anti-shock block valve with relief and anti-cavitation valves
Independent hydraulic skids control	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Hydraulic side shifting	Asphalt round bit teeth
Enclosed / anti-dust machine body	Cutting indicator
Working pressure control gauge	Diverter valve 12 V
565 cc fixed displacement hydraulic piston motor	Direct drive motor transmission

OPTIONS

Hydraulic floating tilt system	Water spray system WSS Basic
Multiple tooth options	Adaptor wiring

MODEL	RPL/SSL/DT 100	RPL/SSL/DT 125	RPL/SSL/DT 150
Engine (hp)	90-135	90-135	90-135
Requirements Flow (gal/min)	32-53	32-53	32-53
Pressure (PSI)	2600-5080	2600-5080	2600-5080
Working width (in)	39	49	59
Total width (in)	65	65	65
Weight (lbs)	2535	2866	2976
Working depth (in)	0-5.5	0-5.5	0-5.5
Rotor diameter (in)	23.6	23.6	23.6
Tilting angle ±	± 8°	± 8°	± 8°
Side shifting (in)	22	22	22
N° picks type R	78	96	114

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R



PICK R/44/A
(standard)



PICK R/44/C
(optional)