

## BLADE FOR SPECIAL VEHICLES - PT

# Dozer Blade PT

Eight-way dozer blade with heavy-duty structure and 2400 mm width. Designed for rough and finish grading in dirt and leveling, the FAE Dozer blade features interchangeable Hardox® wear-resistant cutting edges, a guarantee of resistance and reliability. Thanks to the hydraulic control of the movements, the blade can reach 15° of angle and 10° of side-tilt in both directions. The hydraulic system is equipped with relief valves to protect it from overload in the angle and side-tilt movements.




### MOVEMENTS RANGE




1. Side-tilt



2. Lift






3. Front-tilt



4. Angle

The 8-way movement allows side-tilting (1), lifting/lowering (2), front-tilting (3) and angle (4) the blade, all from the vehicle cabin.

### TECHNICAL SPECIFICATIONS

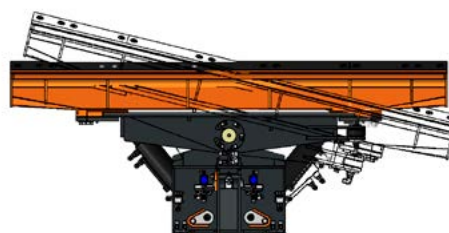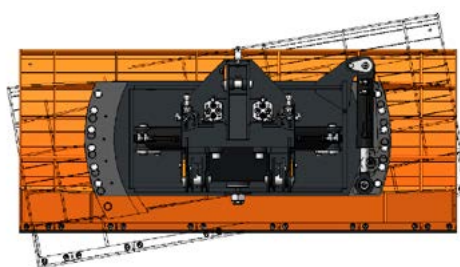

#### MODEL

#### Dozer Blade PT200-240

<b>A. Blade width (mm)</b>	2400
<b>B. Width fully angled (mm)</b>	2320
<b>C. Moldboard height (mm)</b>	970
<b>D. Overall length with attachment plate (mm)</b>	640
<b>E. Blade angle</b>	±15°
<b>F. Center blade-left edge distance (when fully angled) (mm)</b>	1055
<b>G. Center blade-right edge distance (when fully angled) (mm)</b>	1265
<b>H. Blade side-tilt</b>	±10°
<b>Weight (kg)</b>	1340
<b>Moldboard thickness (mm)</b>	15

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.