

PT200

TECHNICAL SPECIFICATIONS.




188 hp | Tier 4 Final / Stage V

STANDARD EQUIPMENT

DOC/DPF/SCR after-treatment system	Comfort driver's seat (heated and air suspended)
CAT C4.4 Acert turbocharged and after-cooled engine	Ergonomic joysticks
Hydrostatic transmission	Heating and air conditioning system
Hydrostatic transmission attachments	Double emergency exit and roof hatch handle to open from the outside
Load Control System	12-mm Lexan cabin windshields
H frame with tilting system	Cabin dust filtration
Oscillating undercarriage	7" LCD color display
500-mm single-grouser steel pads, lubricated chain, dozer-roller version	Multimedia - Bluetooth radio
Combined aluminum cooler with anti-clogging fins	Additional LED headlights
ROPS/FOPS/OPS-approved cabin	Sonic System
Hydraulic winch control kit and push frame	

DIMENSIONS

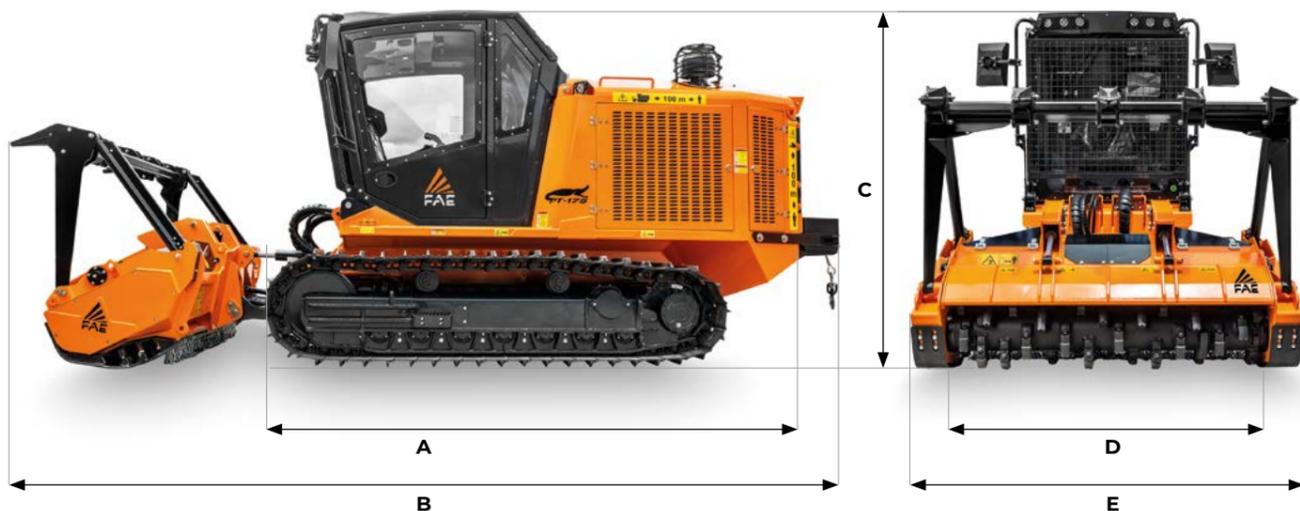

A Overall length without attachment	4518 mm	C Max height	2654 mm
B Transport length with 140/U/PT attachment on ground and winch	6422 mm	D Overall track width	2050 mm (with 500 mm pads)
		E See attachments table	

PT200 Tier 4 Final / Stage V

Engine Gross Power	188 hp
Engine Emission	U.S. EPA Tier 4 Final / EU Stage V
Travel Pumps	2 - EP control - 60 cc - Danfoss
Travel Motors	2 - HY control - 60 cc - Rexroth
Max Travel Pressure	420 Bar
Attachment Pump	1 - EP control - 100 cc - Danfoss
Max Mulcher Pressure	350 Bar
Hydraulic Oil Tank Capacity	230 L
Fuel Tank Capacity	250 L
DEF AdBlue® Tank	19 L
Track Chain	155 mm pitch - Lubricated - Berco (std equipment with 500 mm pads)
Lower Rollers	7 + 7 Single Flange
Carrier Rollers	2 + 2
Voltage	24 volt
Max Forward Speed	7 Km/h
Max Reverse Speed	7 Km/h
Gradeability	45° vertical, 32° lateral
Operating Weight	8600 Kg (std equipment with 500 mm pads) 8915 Kg (std equipment with 700 mm pads)
Ground Pressure	0,28 Kg/cm ² (std equipment / 700 mm pads / 140/U/SONIC/PT200-175)

ATTACHMENT

MODEL	140/U/SONIC/ PT200-140	140/U/SONIC/ PT200-175	140/U/SONIC/ PT200-200	BL4/SONIC/ PT200-175	BL4/SONIC/ PT200-200	200/SC/ PT200
Head type	Mulcher	Mulcher	Mulcher	Mulcher	Mulcher	Stump cutter
Working width (mm)	1407	1827	2067	1827	2067	-
Working width max range (mm)	-	-	-	-	-	1200
Total width (mm)	1751	2171	2411	2200	2440	1167
Weight (Kg)	1550	1700	1800	1580	1710	1755
Rotor diameter (mm)	450	450	450	465	465	-
Disc rotor diameter (mm)	-	-	-	-	-	815
Disc rotor width (mm)	-	-	-	-	-	160
Max working depth (mm)	-	-	-	-	-	500
Max shredding diameter (mm)	250	250	250	300	300	500
No. teeth type C/3+C/3/SS	28+4	38+4	42+2	-	-	-
type I + C/3/SS	40+2	54+2	60+2	-	-	-
No. teeth type M/1+M/2+M/3+M/4	-	-	-	-	-	12+3+12+3
No. blades type BL + C/3/SS	22+2	30+2	34+2	-	-	-
No. blades type BL/MAX	-	-	-	32	36	-


TEETH

140/U/PT			BL4/PT	200/SC/PT
ROTOR C	ROTOR I	ROTOR BL	ROTOR BL	DISC ROTOR
C/3 (standard)	I (option)	BLADE BL (option)	BLADE BL/MAX (standard)	M/1 (standard)
C/3/HD (option)			C/3/MAX (option)	M/2 (standard)
K/3 (option)				M/3 (standard)
BLADE BL (option)				M/4 (standard)
STCL/3 (option)				
C/3/SS (left/right) (side scraper)	C/3/SS (left/right) (side scraper)	C/3/SS (left/right) (side scraper)		

OPTIONS

OPTIONS

Rear winch with 6-tpulling force	Chain guide
Canopy	Roller and drive wheel stone guard
Cabin pressurization system	Reversible and propotional radiator fan
Front cabin grille	Bio-oil
Visibility Package (LED headlights + back-up camera)	Heavy-duty filtration system (drainage and ejector kit)
6-mm Lexan cabin windshields	Engine and hydraulic oil pre-heating system
Air shutoff valve	Custom color
Easy Service package (oil filling pump and service lights)	Forestry protection kit (cabin side window grilles + engine compartment door protectors)
700-mm single-rib steel slides	Active Power Managment

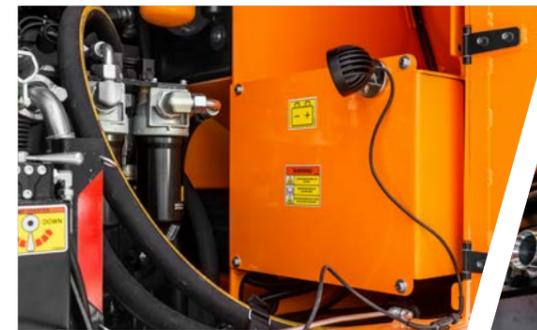


Easy Service package (service light)




Easy Service package (oil filling pump)



Chain guide

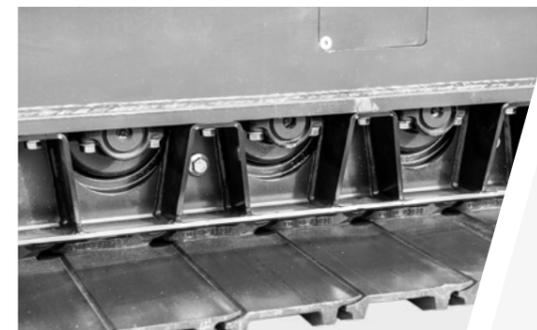

Roller and drive wheel stone guard

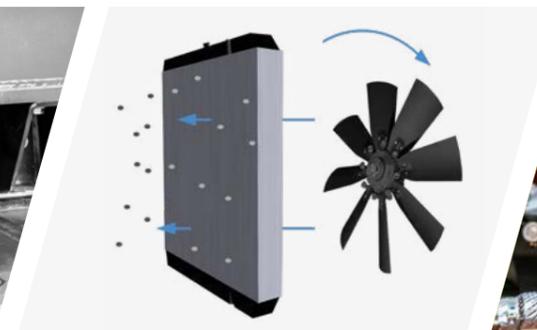

Reversible and propotional radiator fan



Heavy-duty filtration system (ejector)



Rear winch with 6-tpulling force



Canopy



Cabin pressurization system



Heavy-duty filtration system (drainage)



Engine and hydraulic oil pre-heating system



Air shutoff valve



Front cabin grille



Visibility Package (back-up camera)



Visibility-Paket (LED-Scheinwerfe)



Forestry protection kit (cabin side window grilles + engine compartment door protectors)



700-mm single-rib steel slides