

MULTITASKS

MTL

FAE multi-function head for tractors from 140 to 240 hp.

The MTL enables ground stabilization, milling of asphalt and slabs of rock, and crushing of stones, down to a maximum operating depth of 11 in. The variable-geometry crushing chamber, adjustable grid on the hood and adjustable Hardox counter blade enable constantly optimal crushing results. Internal protection

plates on the frame, bolted both centrally and laterally, ensure the head is robust and reliable. The handy depth indicator allows you to check the operating level directly from the cab. The central gearbox system with universal-joint alignment system is designed to be compatible with a wide range of tractors on the market.




140-240 hp



Depth 11 in max



Variable displacement chamber

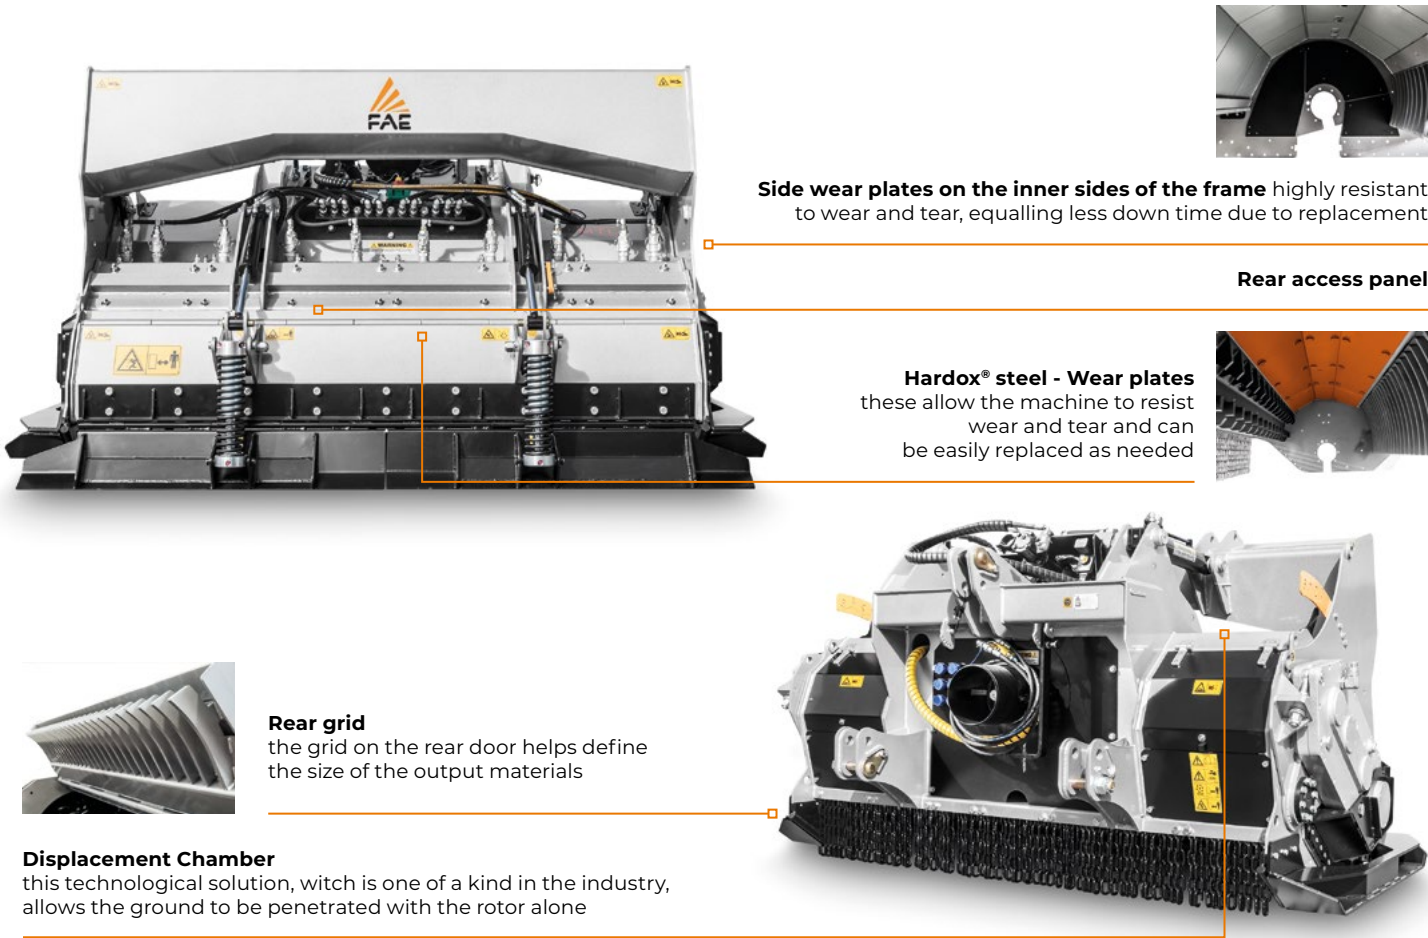

Side wear plates on the inner sides of the frame highly resistant to wear and tear, equalling less down time due to replacement

Rear access panel

Hardox® steel - Wear plates these allow the machine to resist wear and tear and can be easily replaced as needed

Rear grid the grid on the rear door helps define the size of the output materials

Displacement Chamber this technological solution, witch is one of a kind in the industry, allows the ground to be penetrated with the rotor alone

MAIN OPTIONS



Hydraulic top link



Bolt-on chain's protection plates



Multiple tooth options



The Water Spray System (Basic & High Flow) has the dual function of cooling and mixing

STANDARD EQUIPMENT

| | |
|--|--|
| Hydraulic rear hood | Transmission with side gearbox |
| Interchangeable inner antiwear plates in Hardox® | Gearbox with freewheel |
| Enclosed machine body | Friction clutches |
| Variable displacement chamber | PTO shaft with cam clutch |
| Bolted grid on rear hood | Bolted-on rotor shafts (in forged steel) |
| Inside lateral protection | Adjustable Hardox® counter-blade |
| Bolted on protection chains | Dozing blades with spring system |

OPTIONS

| | |
|------------------------|----------------------------------|
| Multiple tooth options | Water spray system WSS Basic |
| Hydraulic top link | Water spray system WSS High Flow |

IVT - CVT or creeper transmission mandatory

| | MODEL | MTL 150 | MTL 175 | MTL 200 | MTL 225 |
|--------------------|------------------------------------|---------|---------|---------|---------|
| | Engine (hp) | 140-240 | 150-240 | 160-240 | 170-240 |
| | PTO (rpm) | 1000 | 1000 | 1000 | 1000 |
| | Working width (in) | 58 | 68 | 77 | 87 |
| | Total width (in) | 72 | 81 | 91 | 100 |
| | Weight (lbs) | 7430 | 7981 | 8532 | 9083 |
| | Rotor diameter (in) | 23.4 | 23.4 | 23.4 | 23.4 |
| G/3 | Working depth (in) (Max. 1-Max. 2) | 6-11 | 6-11 | 6-11 | 6-11 |
| | No. teeth type G/3+STC/3/FP | 42+6 | 50+6 | 60+6 | 70+6 |
| ROTOR R (optional) | Working depth (in) (Max. 1-Max. 2) | 6-11 | 6-11 | 6-11 | 6-11 |
| | No. teeth type R+R/HD | 98+16 | 122+16 | 138+16 | 154+16 |

Max. 1: with rotor only Max. 2: maximum depth (maximum working depth depending on ground conditions). This information refers to the machine equipped as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



G/3 (standard)



G/3/HD (option)

ROTOR TYPE R



R 65 (standard)



R/HD 65 (option)



ADAPTOR R 44 (option)



STC/3/FP (side scraper)



R/HD 65 (side scraper)