

FORESTRY TILLERS FOR SPECIAL VEHICLES

300/S

Universal hydraulic tiller for higher horse power carriers.

The 300/S can shred large stumps and roots up to 16 in deep. The ample working widths make it possible to clear large surfaces and provide excellent material shredding results.



250-400 hp



Ø 20 in max



Depth 16 in




Customized attachment plate (optional)

Hydraulically controlled hood
to adjust final product size

Variable manual displacement hydraulic motor

Dual transmission with side gearbox

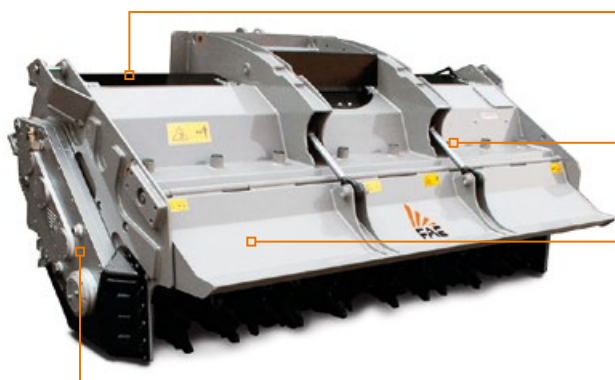

STANDARD EQUIPMENT

Considering the various available options and high level of customization, the final configuration will be specified upon request.

MODEL	300/S 225	300/S 250
Engine (hp)	250-400	250-400
Flow rate (gal/min)	132-174	132-174
Pressure (PSI)	4600-5800	4600-5800
Working width (in)	91	101
Total width (in)	105	115
Weight (lbs)	7760	8311
Rotor diameter (in)	27.6	27.6
Max working depth (in)	16	16
Max shredding diameter (in)	20	20
No. teeth type A/3+MH	88+4	102+4

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions.
The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE A



A/3
(standard)



A/3/HD
(option)



MH
(side scraper)