


DP046001 - USA - Flyer RWM/SSL - 10/2022 - by FAE GROUP S.p.A.



NEW RWM/SSL

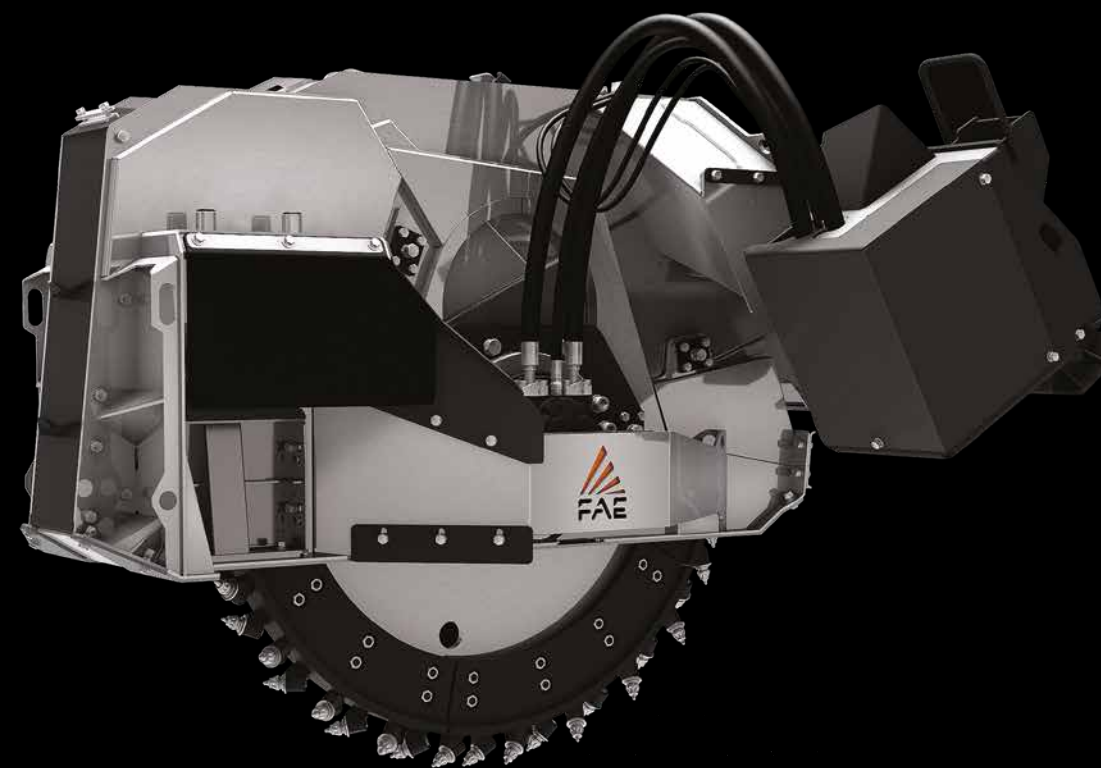

ROAD PLANERS

RWM/SSL

Disc road planer for skid steers.

The RWM/SSL is a disc-type road planer for skid steers from 75 to 120 hp, able to shred channels up to 20 in deep with modular widths of 3, 4 or 5 inches. The RWM/SSL aims mainly to ensure extremely precise excavations for laying electrical, water, gas and fiber


optic conduits. The depth indicator allows precise depth management and the self-leveling penetration skids allow the working depth to be kept constant at all times. The optimized side output allows the track to be kept free of waste materials at all times.



75-120 hp



Depth
20 in

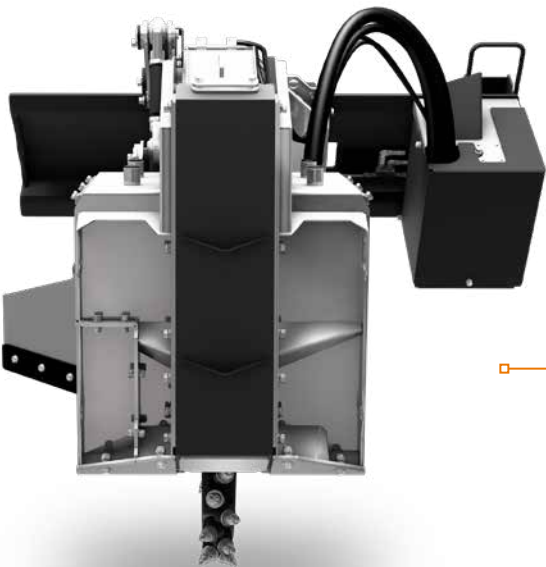

Hydraulic drive system
for accurate positioning over the work area




Modular cutting discs
of 3, 4 or 5 inches


Depth Indicator
for precise depth control



Self-leveling skids
with hydraulic depth control

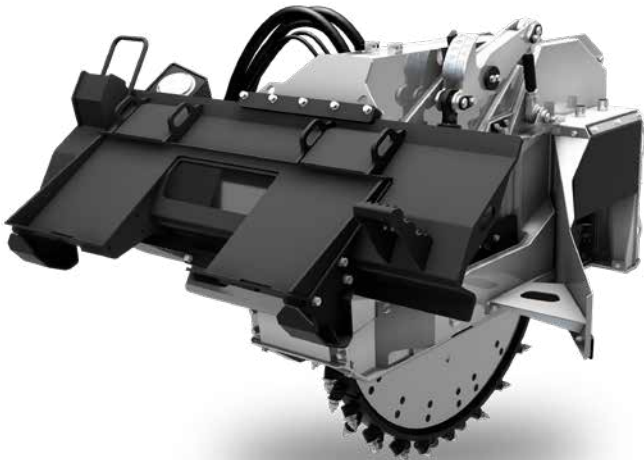

MAIN OPTIONS



Cutting disc available in three widths



WSS Basic water injection system
to reduce dust and cool the teeth



Wiring adaptors
Wiring adaptors interface to allows a Plug & Play coupling with the most popular skid steers

STANDARD EQUIPMENT

Hydraulic working depth adjustment	Anti-shock block valve with relief and anticavitation valves
Hydraulic side shifting	Hydraulic hoses for connections
Mobile sides-frame	Interchangeable Hardox® antiwear skids plate
Enclosed / anti-dust machine body	Disc rotor with interchangeable sectors
Working pressure control gauge	Diverter valve 12 V
Direct drive hydraulic motor	Supporting service leg

OPTIONS

Multiple disc rotor width options	Adaptor wiring
Water spray system WSS Basic	

MODEL

RWM/SSL

	80 mm Disc Rotor STD	100 mm Disc Rotor OPT	120 mm Disc Rotor OPT
Engine (hp)	75-120	75-120	75-120
Requirements Flow (gal/min)	32-40	32-40	32-40
Pressure (PSI)	2900-5080	2900-5080	2900-5080
Working width (in)	3	4	5
Total width (in)	65	65	65
Weight (lbs)	2870	2920	2955
Working depth (in)	10-20	10-20	10-20
Rotor diameter (in)	55	55	55
Side shifting (in)	22	22	22
N° teeth type R	40	50	55

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R



R 44/C
(standard)