

FORESTRY MULCHERS FOR EXCAVATORS

UML/S/EX/VT - UML/S/EX/SONIC

Forestry mulcher with fixed tooth rotor for excavators.

Specifically developed for excavators ranging from 18 - 25 tons. Using key design features, such as interchangeable counter-blades and other engineering advantages, it approaches the performance levels of our largest model, the UMM/EX.

Furthermore, the VT automatic variable displacement hydraulic motor increases efficiency. This allows the machine to carry out complex operations effortlessly while working on sides of the roads, along river banks and on steep slopes.



Sonic System




38-79 gal/min



Ø 12 in max



18-25 t

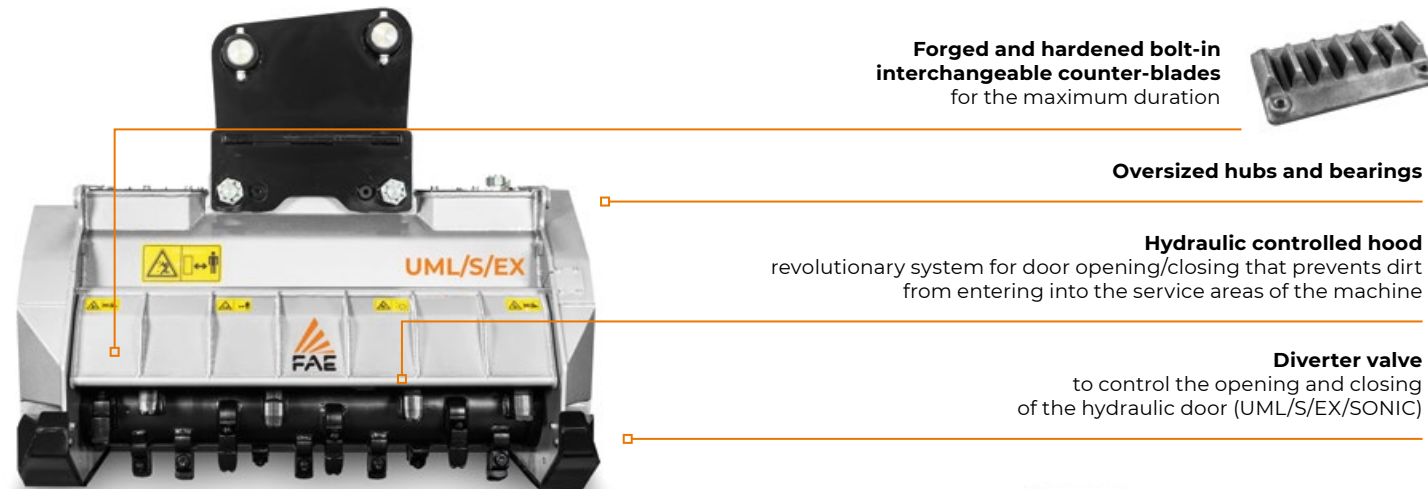

Forged and hardened bolt-in interchangeable counter-blades for the maximum duration

Oversized hubs and bearings

Hydraulic controlled hood revolutionary system for door opening/closing that prevents dirt from entering into the service areas of the machine

Diverter valve to control the opening and closing of the hydraulic door (UML/S/EX/SONIC)




Sonic System is a new automatic intelligent system that manages the hydraulic transmission. It makes the mulching machine to perform at the maximum capacity in all conditions (UML/S/EX/SONIC)

Motor enclosed in frame protected from dirt and damage



VT motor adjustable motor to obtain the maximum performance out of any excavator

Dual row protection chains deflects debris exiting the machine, increasing safety

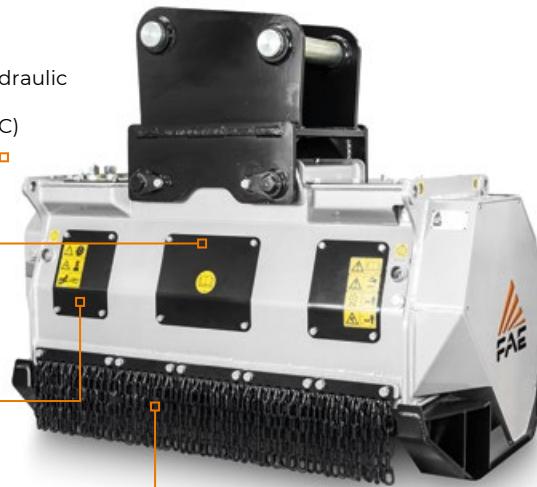


MAIN OPTIONS



Rotor with Bite Limiter technology maximum productivity using the least amount of power



Diverter valve to control the opening and closing of the hydraulic door (UML/S/EX/VT)



Additional reinforced side plates for extreme conditions



Customized attachment bracket

STANDARD EQUIPMENT

110/60cc variable torque hydraulic piston motor (38-79 gpm) (UML/S/EX/VT)	110cc variable torque hydraulic piston motor (38-79 gpm) (UML/S/EX/SONIC)
Poly Chain® belt transmission	Bulkhead for hydraulic connections
Flow control system valve	Hydraulic front hood
Diverter valve (UML/S/EX/SONIC)	Inner anti wear clad plates FCP
Safety and anticavitation valve	Screwed protection chains
Enclosed / anti dust machine body	Interchangeable counterblades
Motor enclosed in the frame	Sonic System (UML/S/EX/SONIC)

OPTIONS

160/108cc variable torque hydraulic piston motor (62-79 gpm) (UML/S/EX/VT)	Customized attachment bracket with pins
Customized setting hydraulic motor (UML/S/EX/VT)	Customized attachment bracket with pins and leg
Diverter valve (UML/S/EX/VT)	Multiple tooth options
Additional reinforced side plates	Rotor Bite Limiter
Not supplied with hoses	Case drain required

MODEL	UML/S/EX/VT 125	UML/S/EX/VT 150	UML/S/EX/SONIC 125	UML/S/EX/SONIC 150
Flow rate (gal/min)	38-79	38-79	38-79	38-79
Pressure (PSI)	3200-5080	3200-5080	3200-5080	3200-5080
Excavator weight (t)	18-25	18-25	18-25	18-25
Working width (in)	53	62	53	62
Weight (lbs)	3197	3417	3197	3417
Rotor diameter (in)	17.7	17.7	17.7	17.7
Max shredding diameter (in)	12	12	12	12
No. teeth type C/3+C/3/SS	26+4	32+4	26+4	32+4
type I+C/3/SS	38+2	46+2	38+2	46+2

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE C



TOOTH C/3 (standard)



TOOTH C/3/HD (option)



BLADE BL (option)



TOOTH K/3 (option)

ROTOR TYPE BL



BLADE BL (option)

ROTOR TYPE I



TOOTH I (option)



TOOTH C/3/SS (side scraper)