

## FORESTRY MULCHERS FOR EXCAVATORS

# UML/S/EX

### Forestry mulcher with fixed tooth rotor for excavators.

Specifically developed for excavators ranging from 18 - 25 tons. Using key design features, such as interchangeable counter-blades and other engineering advantages, it approaches the performance levels of our largest model, the UMM/EX.

Furthermore, the VT automatic variable displacement hydraulic motor increases efficiency. This allows the machine to carry out complex operations effortlessly while working on sides of the roads, along river banks and on steep slopes.



Sonic System



38-79 gal/min



Ø 12 in max



18-25 t



**Forged and hardened bolt-in interchangeable counter-blades** for the maximum duration



**Oversized hubs and bearings**

**Hydraulic controlled hood** revolutionary system for door opening/closing that prevents dirt from entering into the service areas of the machine

**Diverter valve** to control the opening and closing of the hydraulic door (UML/S/EX/SONIC)




**Sonic System** is a new automatic intelligent system that manages the hydraulic transmission. It makes the mulching machine to perform at the maximum capacity in all conditions (UML/S/EX/SONIC)

**Motor enclosed in frame** protected from dirt and damage



**VT motor** adjustable motor to obtain the maximum performance out of any excavator

**Dual row protection chains** deflects debris exiting the machine, increasing safety

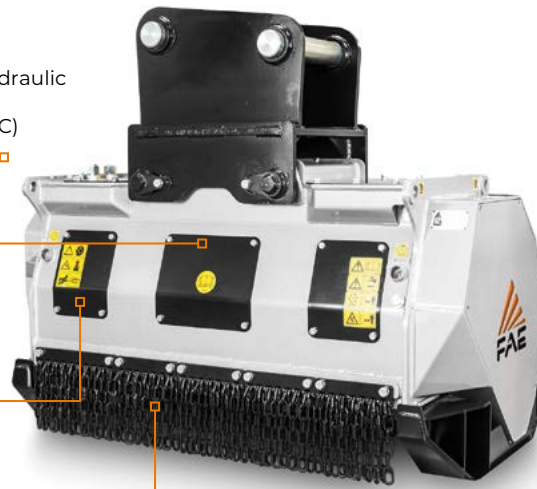

## MAIN OPTIONS



**Rotor with Bite Limiter technology** maximum productivity using the least amount of power



**Diverter valve** to control the opening and closing of the hydraulic door (UML/S/EX/VT)



**Additional reinforced side plates** for extreme conditions



**Customized attachment bracket**

## STANDARD EQUIPMENT

110/60cc variable torque hydraulic piston motor (38-79 gpm) (UML/S/EX/VT)	110cc variable torque hydraulic piston motor (38-63 gpm) (UML/S/EX/SONIC)
Timing belt transmission	Bulkhead for hydraulic connections
Flow control system valve	Hydraulic front hood
Diverter valve (UML/S/EX/SONIC)	Inner anti wear clad plates FCP
Safety and anticavitation valve	Screwed protection chains
Enclosed / anti dust machine body	Interchangeable counterblades
Motor enclosed in the frame	Sonic System (UML/S/EX/SONIC)
Control box for diverter valve (UML/S/EX/SONIC)	Interchangeable bolt-on counter blades


## OPTIONS

160/108cc variable torque hydraulic piston motor (62-79 gpm) (UML/S/EX/VT)	Customized attachment bracket with pins
Customized setting hydraulic motor (UML/S/EX/VT)	Customized attachment bracket with pins and leg
Diverter valve (UML/S/EX/VT)	Multiple tooth options
Additional reinforced side plates	Rotor Bite Limiter
Control box for diverter valve (UML/S/EX/SONIC)	
Not supplied with hoses	Case drain required

MODEL	UML/S/EX/VT-125	UML/S/EX/VT-150	UML/S/EX/SONIC-125	UML/S/EX/SONIC-150
<b>Flow rate</b> (gal/min)	38-79	38-79	38-63	38-63
<b>Pressure</b> (PSI)	3200-5080	3200-5080	3200-5080	3200-5080
<b>Excavator weight</b> (t)	18-25	18-25	18-25	18-25
<b>Working width</b> (in)	53	62	53	62
<b>Weight</b> (lbs)	3197	3417	3197	3417
<b>Rotor diameter</b> (in)	17.7	17.7	17.7	17.7
<b>Max shredding diameter</b> (in)	12	12	12	12
<b>No. teeth</b> type C/3+C/3/SS	26+4	32+4	26+4	32+4
type I+C/3/SS	38+2	46+2	38+2	46+2
type BL	20+2	24+2	20+2	24+2

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

## ROTOR TYPE C

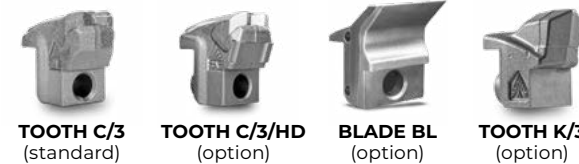

## ROTOR TYPE BL



## ROTOR TYPE I

