

SFL

Multitask head for 130 to 220 hp tractors. The SFL can shred wood, shrubs, roots up to 6 inches in diameter, and stumps up to 10 inches in diameter. It can also crush stones up to 4 inches in diameter, operating at depths down to 8 inches. Top features include the adjustable

counter blade, the anti-wear Hardox plates, the hydraulic hood, and the hydraulic support roller (optional). The SFL is available in two widths: SFL-200 and SFL-225, both with dual gear transmission. The head mounts a rotor with K/3 teeth.




130-220 hp



Ø 4 in max (stones)
Ø 6 in max (trees)
Ø 10 in max (stump)




Depth 8 in

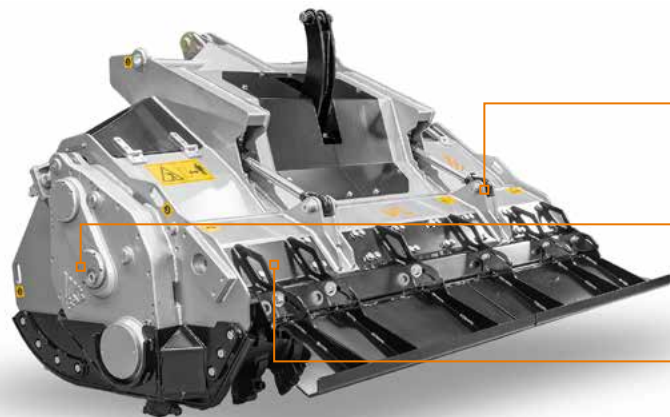

Transmission with side gearbox
maximize the power delivered to the rotor

Interchangeable bolt-on counter blades
for fine mulching and easy maintenance

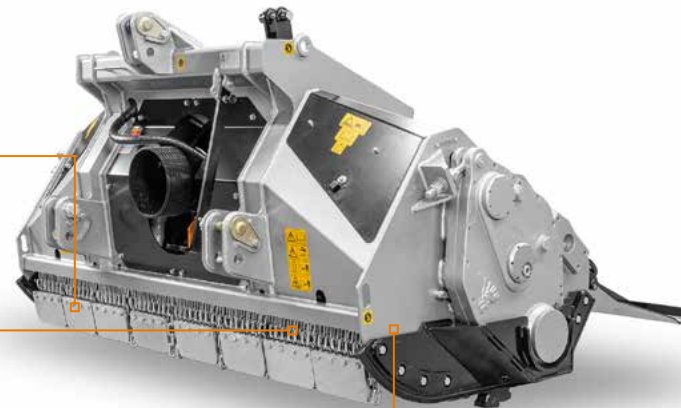

Adjustable Hardox® counter blade
to effectively control the final product size

Interchangeable wear-resistant Hardox® plates
for use in extreme conditions and
for easier maintenance



W style self-aligning system

Hydraulically adjustable rear hood	Central PTO shaft with cam clutch
Interchangeable wear-resistant Hardox® plates	Interchangeable forged steel rotor shafts
Wear-resistant side plates	Interchangeable bolt-on counter blades
Bolt-on interchangeable protection chains	Adjustable Hardox® counter blade
Transmission with side gearbox	Skids to go underground
Freewheel gearbox	PTO shaft support for machine at rest
Side PTO shafts with friction clutches	Rotor with teeth K/3

Hood grille	Z style self-aligning system
Plates for bolt-on protection chains	W style self-aligning system
Hydraulic support roller	Dozing blades
Hydraulic top link cylinder	
IVT - CVT or creeper transmission mandatory	Forestry tires and carrier belly pan strongly recommended

MODEL	SFL-200	SFL-225
Engine (hp)	130-220	130-220
PTO (rpm)	1000	1000
Working width (in)	82	91
Total width (in)	95	104
Weight (lbs)	5401	5732
Rotor diameter (in)	22	22
Max shredding diameter stones (in)	4	4
trees (in)	6	6
stump (in)	10	10
Max working depth (in)	8	8
No. teeth type K/3+C/3/SS+BAZ	52+6+4	58+6+4

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



TOOTH K/3
(standard)



TOOTH C/3/SS
(side scraper)



TOOTH BAZ
(side scraper)