

EXCAVATOR MULCHERS

PML/HY



from 16 to 40 L/min



Ø 2 cm max



from 1,5 to 3,5 t

MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

FAE's smallest excavator mulcher is designed for cleaning up brambles and shrubs.

This mulcher can be equipped with a standard 8cc or optional 16cc motor for mounting on excavators ranging from 1.3 to 3.5 tons.




STANDARD EQUIPMENT

Enclosed machine body
Belt transmission
8cc gear motor with integrated anticavitation valve - (16 - 20 L/min)
Hydraulic hoses
Welded counter blade
Rear roller
Self leveling protection rubber
Possibility to have the rotor equipped with PML hammers or Y-fails

OPTIONS

16cc gear motor with integrated anticavitation valve - (35 - 40 L/min)
Customized attachment bracket
Attachment plate with self leveling device
Multiple tooth options

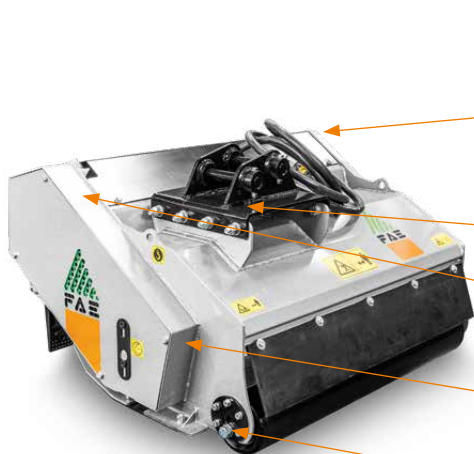

Attachment plate with self leveling device
(optional)
to adapt to all types of terrain

Customized attachment bracket
(optional)

Enclosed machine body

Steel counter-blades
helps mulch material into a smaller final size

Self-cleaning support roller

MODEL	Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max				PML	Y
PML/HY 50	16	40	150	210	1,5	3,5	500	160	20	8	8
PML/HY 70	16	40	150	210	2,0	3,5	700	180	20	10	10
PML/HY 90	16	40	150	210	2,5	3,5	900	200	20	14	14

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.