

NEW

FORESTRY MULCHERS FOR EXCAVATORS

# BLO/EX

Forestry mulcher with Bite Limiter technology for excavators up to 4 tons.

The BLO/EX forestry mulcher for 2-4 ton excavators can shred material up to 8 cm in diameter. Bite Limiter technology is ideal for high productivity vegetation management, designed with reliable and efficient shredding and easy maintenance in mind.

The BLO/EX's Direct Drive motor minimizes maintenance and makes it possible to have an extremely compact machine body. The BLO/EX can be equipped with BL/MINI blades and C/3/MINI teeth.

 8-18 gal/min

 Ø 3 in max

 2-4 t




Hydraulic block with flow control valve in the motor

Fixed thumb bracket built into the frame useful for moving materials that need to be mulched

Direct Drive Motor for less maintenance and reduced size

Rotor Bite Limiter special steel profiles limit the blades' reach and optimize productivity

Adjustable rear deflector controls mulched material output for greater safety

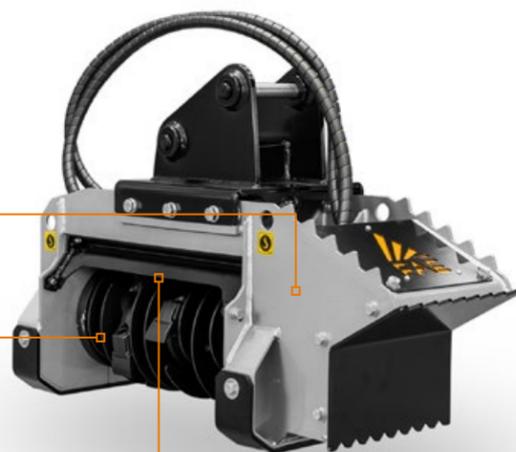

## MAIN OPTIONS



Customized attachment bracket kit with customized pins



Attachment plate with self-leveling device (optional) adapts to all types of terrain

### STANDARD EQUIPMENT

11 cc-gear hydraulic motor (BLO/EX 50)	Deflector
16 cc-gear hydraulic motor (BLO/EX 75)	Thumb bracket
Flow Control system valve with integrated safety and anticavitation valves	Direct-drive transmission
Enclosed, dust-resistant machine body	Interchangeable forged steel rotor shafts
Motor enclosed in the frame	Bite Limiter Rotor
Hydraulic hoses	Wear-resistant interchangeable Hardox® soles

### OPTIONS

Customized attachment bracket kit with customized pins	11 cc-gear hydraulic motor (BLO/EX 75)
Attachment plate with self-leveling device	Multiple tooth options
16 cc-gear hydraulic motor (BLO/EX 50)	

Case drain required

MODEL	BLO/EX 50	BLO/EX 75
Flow rate (gal/min)	8-18	8-18
Pressure (PSI)	2600-3600	2600-3600
Excavator weight (t)	2-4	3-4
Working width (in)	22	31
Total width (in)	40	49
Weight (lbs)	470	553
Rotor diameter (in)	12	12
Max shredding diameter (in)	3	3
No. blades type BL/MINI	10	14
No. tooth type C/3/MINI	10	14

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.



BLADE BL MINI (standard)



TOOTH C/3/MINI (option)