


FORESTRY MULCHERS FOR EXCAVATORS

NEW BL4/EX/VT

The mulcher for large excavators, with Bite Limiter technology.

The BL4/EX/VT for 18-25 ton excavators mulches trees up to 12 in in diameter and comes in two working widths: 53 in and 63 in. The BL4/EX/VT is ideal for handling and removing vegetation in wooded areas, especially for jobs that require a large shredding capacity and speed.

The rotor features Bite Limiter technology. Steel limiter rings limit the reach (bite) of the teeth, reducing the amount of power needed and guaranteeing constant working speed and excellent performance. The heat-treated forged-steel BL blades are made to last and can be sharpened to keep operating costs lower.

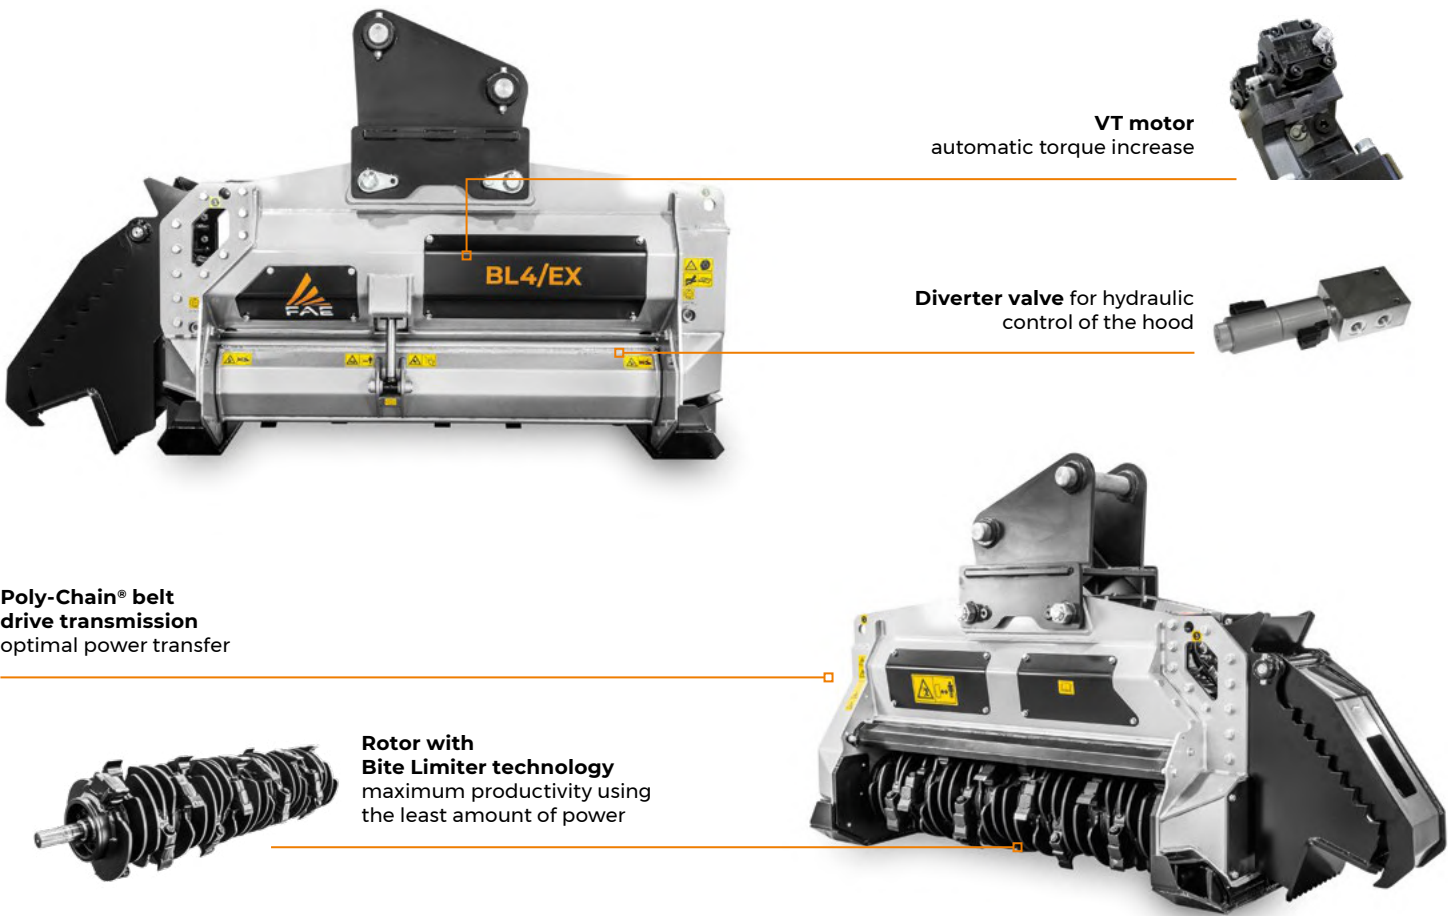

MAIN OPTIONS



Sonic System keeps the excavator perfectly aligned



Thumb bracket with hydraulic thumb for handling material



Deflector safely directs mulched material



Spike PRO counter-blades for finer mulched material



Sonic System



38-79 gal/min



Ø 12 in max



18-25 t



STANDARD EQUIPMENT

110/60 cc variable torque hydraulic piston motor	Poly Chain® Belt Transmission
Flow control system valve	Bulkhead for hydraulic connections
Diverter valve	Hydraulic rear hood
Safety and anticavitation valve	Adjustable skids
Enclosed / anti dust machine body	Rotor Bite Limiter
Motor enclosed in the frame	

OPTIONS

160/108 cc variable torque hydraulic piston motor	Hydraulic thumb
Customized setting hydraulic motor	Spike Pro counter-blade
Hydraulic front hood for excavator AUX line	Customized attachment bracket with pins
Material deflector	Multiple tooth options
Additional reinforced side plates	Sonic System
Front fixed thumb bracked	
Not supplied with hoses	Case drain required

MODEL	BL4/EX/VT 125	BL4/EX/VT 150
Flow rate (gal/min)	38-79	38-79
Pressure (PSI)	3200-5080	3200-5080
Excavator weight (t)	18-25	18-25
Working width (in)	53	62
Weight (lbs)	3417	3638
Rotor diameter (in)	18.6	18.6
Max shredding diameter (in)	12	12
No. blades type BL+C/3/SS	20+2	24+2

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



BL BLADE (standard)



C/3/SS (side scraper)